



AC/DC Adapter

Safe, Efficient & Earth Friendly

UNIFIVE

OUR PRINCIPLE



SAFE



EARTH FRIENDLY



EFFICIENT



About UNIFIVE

Since 1989, UNIFIVE has been known for its "high quality and high reliability" and is involved in the market of AC/DC power supplies (Adapter and Open Frame etc.).

We are committed to research and development of products that meet the increasingly sophisticated electronics industry and are widely used in computers, home appliances, consumer electronics, communications, information, industry, medical and other fields. We also has patent for 360 degree AC PIN interchangeable type adaptor and it is leading the world's exclusive design.

UNIFIVE provides products which are smaller, lighter, more power efficient, and easier to use. We selling products all over the world and get the certifications for each of country. And also acquired ISO9001:2015 and ISO14001:2015 etc. to ensure products meet the latest regulations.

Customized Solution

In additional to provide customer standard adaptor, UNIFIVE also strives to provide unique product, customized service with various, high quality and regulation to satisfied customer's special requested.



Experience Team

UNIFIVE has been established for 30 years, has great development experience in switching power supply and also has the most professional service team. We will continue to work with customers to create competitive products.




Understand your needs and do our best!

Typical model

Power Rating	Input Voltage	Output Voltage
5W-160W	90V-264V	3V-48V

Safety

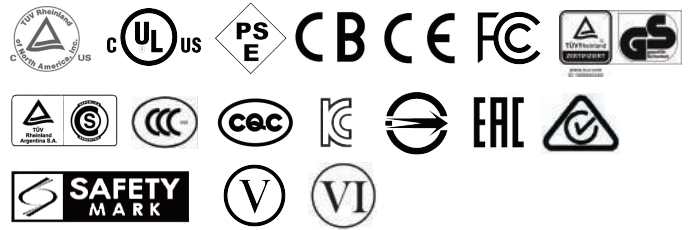

5W

UZI105

Output 5V



5V/1.0A



- Stability
- Ultra small size

75.0*50.6*29.8mm

5W

UZ105/UZ305

Output 5V



5V/1.0A



- Stability
- Ultra small size

63.9*49.5*29.5mm

5W

UW305

Output 5V



5V/0.5A or 5V/1.0A



- Stability
- Ultra small size
- AC PIN Fold

52.6*38.8*17.5mm

6W

UVx305

Output 5V-24V



5V/0.5A~1.0A or
5.9V/0.85A~1.0A or 6V/0.5A
7V/0.5A or 7.5V/0.8A
8V/0.6A or 9V/0.5A or 12V/0.5A
13V/0.45A or 24V/0.2A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

59.0*28.0*37.6mm

6W

UCx305

Output 3V-12V



3V/1.0A or 5V/0.8A~1.0A
9V/0.5A or 12V/0.25A~0.5A



- Low cost
- Ultra small size
- Customized AC PIN base on different countries .

45.8*33.3*25.4mm

6W

UNx305

Output 5V-12V



5V/0.5A~1.0A or
5.6V/0.5A~0.6A or
9V/0.5A or 12V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

45.8*33.3*25.4mm

6W

SVx313

Output 5V-24V



5V/1.2A(2.0A) or 5.9V/1.0A(1.8A)
9V/0.65A(1.3A) or 12V/0.5A(1.0A)
24V/0.25A(0.5A)



- -20°C~60°C Operating Temperature
- Light weight
- Customized AC PIN base on different countries .

59.0*28.0*37.6mm

10W

UUx311

Output 5V-24V



5V/2.0A or 7.5V/1.6A or 9V/1.3A
9.5V/1.0A or 12V/1.0A or
15V/0.8A or 24V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

70.0*35.0*44.0mm

10W

UVx313

Output 5V-24V



5V/2.0A or 9V/1.0A or 9V/1.3A
12V/1.0A or 24V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

59.0*28.0*37.6mm

10W

UW310

Output 5V



5V/1.0A or 5V/1.5A
5V/2.0A or 5V/2.1A



- Stability
- Ultra small size
- AC PIN Fold

53.3*38.0*21.8mm

10W

LMx310

Output 5V-12V



5V/2.0A or 12V/1.0A



- Stability
- Customized AC PIN base on different countries .

Ø48.0*25.0mm

10W

UCx310

Output 5V-24V



5V/1.2A~1.5A~2.0A or
5.3V/1.5A or 9V/1.3A
12V/0.8A~1.0A or 24V/0.5A



- Low cost
- Ultra small size
- Customized AC PIN base on different countries .

60.0*44.0*30.0mm

12W

UAx110/UAx310

Output 5V-24V



5V/1.2A~2.0A
12V/1.0A or 24V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

45.8*33.3*25.4mm

12W

UNx112/UNx312

Output 5V-24V



5V/2.0A or 5.9V/2.0A or
9V/1.3A or 12V/1.0A or
24V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

63.9*49.5*29.5mm

12W

UNI312

Output 5V-24V



5V/2.0A or 5.9V/2.0A or
9V/1.3A or 12V/1.0A
24V/0.5A



- Stability
- Light weight

75.0*50.6*29.8mm

12W

UNT312

Output 5V-24V



5V/2.0A or 5.9V/2.0A or
9V/1.3A or 12V/1.0A
24V/0.5A



- Stability
- Light weight

75.0*50.6*29.8mm

12W

USx10/USx30

Output 3V-18V



3V/2.0A or 3.3V/2.0A or 5V/2.0A
6V/1.8A or 7.5V/1.6A or 9V/1.3A
12V/1.0A or 15V/0.8A or
18V/0.65A



- Stability
- Light weight
- Customized AC PIN base on different countries .

60.0*44.0*30.0mm

12W

USx112/USx312

Output 3V-24V



3V/2.0A or 3.3V/2.0A
5V/2.0A~2.3A or 5.5V/2.0A
7V/1.4A~1.6A or 7.5V/1.6A
9V/1.3A or 12V/1.0A
15V/0.8A or 24V/0.5A



- Stability
- Light weight
- Customized AC PIN base on different countries .

63.9*49.5*29.5mm

12W

UIA312

Output 5V-24V



5V/2.0A~2.3A or 5.5V/2.0A
7V/1.4A~1.6A or 7.5V/1.6A
9V/1.3A or 12V/1.0A
15V/0.8A or 24V/0.5A



- Stability
- Light weight

68.2*49.8*26.3mm

12W

UIT312

Output 5V-24V



5V/2.0A~2.3A or 5.5V/2.0A
7V/1.4A~1.6A or 7.5V/1.6A
9V/1.3A or 12V/1.0A
15V/0.8A or 24V/0.5A



- Stability
- Light weight

68.2*49.8*26.3mm

12W

SUx318

Output 5V-48V



5V/2.0A(3.0A) or 5.9V/2.0A(2.5A)
9V/1.45A(2.0A) or 12V/1.0A(1.5A)
15V/0.8A(1.2A) or 24V/0.5A(0.75A)
48V/0.25A(0.4A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

70.0*35.0*48.0mm

15W

USx115/USx315

Output 5V-48V



5V/2.5A or 7.5V/2.0A or 9V/1.6A
12V/1.25A or 15V/1.0A
24V/0.65A or 48V/0.3A



- Stability
- Light weight
- Customized AC PIN base on different countries .

63.9*49.5*29.5mm

15W UNx115/UNx315 Output 5V-48V



5V/2.5A or 5.9V/2.3A or 9V/1.6A
12V/1.25A or 15V/1.0A
24V/0.65A or 48V/0.3A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

63.9*49.5*29.5mm

15W UNI315 Output 5V-48V



5V/2.5A or 5.9V/2.3A or 9V/1.6A
12V/1.25A or 15V/1.0A
24V/0.65A or 48V/0.3A



- Stability
- Light weight

75.0*50.6*29.8mm

15W UNT315 Output 5V-48V



5V/2.5A or 5.9V/2.3A or 9V/1.6A
12V/1.25A or 15V/1.0A
24V/0.65A or 48V/0.3A



- Stability
- Light weight

75.0*50.6*29.8mm

15W UI315 Output 5V-48V



5V/2.5A or 7.5V/2.0A or 9V/1.6A
12V/1.25A or 15V/1.0A
24V/0.65A or 48V/0.3A



- Stability
- Light weight

68.2*49.8*26.3mm

15W UIT315 Output 5V-48V



5V/2.5A or 7.5V/2.0A or 9V/1.6A
12V/1.25A or 15V/1.0A
24V/0.65A or 48V/0.3A



- Stability
- Light weight

68.2*49.8*26.3mm

18W USx118/USx318 Output 5V-48V



5V/2.6A-3.0A or 5.9V/2.8A
9V/2.0A or 12V/1.5A or 15V/1.2A
24V/0.75A or 48V/0.4A



- Stability
- Light weight
- Customized AC PIN base on different countries .

63.9*49.5*29.5mm

18W UNx118/UNx318 Output 5V-48V



5V/2.6A-3.0A or 5.5V/3.0A
5.9V/2.8A or 6V/2.8A or 9V/2.0A
12V/1.5A or 15V/1.2A
24V/0.75A or 48V/0.4A



- Stability
- Light weight
- Customized AC PIN base on different countries .

63.9*49.5*29.5mm

18W UUX118/UUX318 Output 5V-48V



5V/2.0A-3.0A or 5.9V/2.8A
9V/2.0A or 12V/1.25A-1.5A
15V/1.2A or 24V/0.75A
48V/0.4A



- Stability
- Low cost
- Customized AC PIN base on different countries .

70.0*35.0*48.0mm

18W

UNI318

Output 5V-48V



5V/2.6A~3.0A or 5.5V/3.0A
5.9V/2.8A or 9V/2.0A
12V/1.5A or 15V/1.2A
24V/0.75A or 48V/0.4A



- Stability
- Light weight

75.0*50.6*29.8mm

18W

UNT318

Output 5V-48V



5V/2.6A~3.0A or 5.5V/3.0A
5.9V/2.8A or 9V/2.0A
12V/1.5A or 15V/1.2A
24V/0.75A or 48V/0.4A



- Stability
- Light weight

75.0*50.6*29.8mm

18W

UI318

Output 5V-48V



5V/2.0A~2.6A or 5V/3.0A
9V/2.0A or 12V/1.5A or 15V/1.2A
24V/0.75A or 48V/0.4A



- Stability
- Light weight

68.2*49.8*26.3mm

18W

UIT318

Output 5V-48V



5V/2.0A~2.6A or 5V/3.0A
9V/2.0A or 12V/1.5A or 15V/1.2A
24V/0.75A or 48V/0.4A



- Stability
- Light weight

68.2*49.8*26.3mm

18W

SNI324

Output 9V-24V



9V/2.0A(2.6A) or 12V/1.5A(2.0A)
15V/1.2A(1.6A) or 18V/1.0A(1.3A)
24V/0.65A(1.0A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.8*46.8*32.1mm

18W

SNT324

Output 9V-24V



9V/2.0A(2.6A) or 12V/1.5A(2.0A)
15V/1.2A(1.6A) or 18V/1.0A(1.3A)
24V/0.65A(1.0A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.8*46.8*32.1mm

18W

SVx324

Output 5V-24V



5V/2.0A(3.0A) or 6V/2.0A(3.0A)
10V/1.8A(2.4A) or 10.5V/1.1A(1.1A)
12V/1.5A(1.5A) or 12V/1.5A(2.0A)
19V/1.0A(1.2A) or 24V/0.75A(1.0A)



- -20°C~60°C Operating Temperature
- Light weight
- Customized AC PIN base on different countries .

72.7*35.7*53.0mm

24W

USx124/USx324

Output 5V-25V



5V/4.0A~3.0A or 25V/1.0A



- Stability
- Light weight
- Customized AC PIN base on different countries .

93.0*50.0*33.0mm

24W

UUx324

Output 5V-24V



5V/2.0A-3.0A or 9V/2.0A
12V/1.25A-1.5A-2.0A or
24V/1.0A



- Stability
- Low cost
- Customized AC PIN base on different countries .

72.7*35.7*53.0mm

24W

UVx324

Output 5V-24V



5V/3.0A or 6V/3.0A or 10V/2.4A
10.5V/1.1A or 12V/1.5A-2.0A
19V/1.2A or 24V/1.0A



- Stability
- Low cost
- Customized AC PIN base on different countries .

72.7*35.7*53.0mm

24W

UIA324

Output 5V-24V



5V/4.0A or 7V/3.4A or 9V/2.6A
10V/2.4A or 12V/2.0A or
15V/1.6A or 18V/1.3A or
24V/1.0A



- Stability
- Light weight

95.9*43.8*28.5mm

24W

UIB324

Output 5V-24V



5V/4.0A or 7V/3.4A or 9V/2.6A
10V/2.4A or 12V/2.0A or
15V/1.6A or 18V/1.3A or
24V/1.0A



- Stability
- Light weight

98.8*46.8*32.1mm

24W

UNI324

Output 9V-24V



9V/2.6A or 12V/2.0A
15V/1.6A or 18V/1.3A
24V/1.0A



- Stability
- Light weight

98.8*46.8*32.1mm

24W

UNT324

Output 9V-24V



9V/2.6A or 12V/2.0A or
15V/1.6A or 18V/1.3A or
24V/1.0A



- Stability
- Light weight

98.8*46.8*32.1mm

24W

SNI336

Output 12V-24V



12V/2.0A(3.0A) or 15V/1.6A(2.4A)
24V/1.0A(1.5A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.5*46.8*32.1mm

24W

SNT336

Output 12V-24V



12V/2.0A(3.0A) or 15V/1.6A(2.4A)
24V/1.0A(1.5A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.5*46.8*32.1mm

24W

SVx336

Output 12V-36V



12V/2.0A(3.0A) or 15V/1.6A(2.4A)
16V/1.5A(2.2A) or 18V/1.4A(2.0A)
24V/1.0A(1.5A) or 35V/0.68A(1.0A)
36V/0.66A(1.0A)



- -20°C~60°C Operating Temperature
- Light weight
- Customized AC PIN base on different countries .

72.7*35.7*53.0mm

30W

UZA130

Output 12V



12V/2.1A or 12V/2.5A



- Stability
- Light weight

113.5*54.0*36.3mm

36W

UUx336

Output 12V-35V



12V/3.0A or 15V/2.4A
16V/2.2A or 18V/2.0A
24V/1.5A or 35V/1.0A



- Stability
- Light weight
- Customized AC PIN base on different countries .

72.7*35.7*53.0mm

36W

UVx336

Output 9V-36V



9V/3.0A or 12V/3.0A or 15V/2.4A
16V/2.2A or 18V/2.0A or 24V/1.5A
35V/1.0A or 36V/1.0A



- Stability
- Low cost
- Customized AC PIN base on different countries .

72.7*35.7*53.0mm

36W

UIA336

Output 12V-35V



12V/2.0A~3.0A or 24V/1.5A or 35V/1.0A



- Stability
- Light weight

95.9*43.8*28.5mm

36W

UIB336

Output 12V-35V



12V/2.0A~3.0A or 24V/1.5A or 35V/1.0A



- Stability
- Light weight

98.8*46.8*32.1mm

36W

UNI336

Output 12V-24V



12V/3.0A or 15V/2.4V or 24V/1.5A



- Stability
- Light weight

98.5*46.8*32.1mm

36W

UNT336

Output 12V-24V



12V/3.0A or 15V/2.4A or 24V/1.5A



- Stability
- Light weight

98.5*46.8*32.1mm

36W

SNI345

Output 12V-24V



12V/2.5A(3.8A) or 15V/2.0A(3.0A)
16V/2.0A(2.8A) or 18V/1.8A(2.5A)
19V/1.67A(2.4A) or 24V/1.3A(1.9A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.5*46.8*32.1mm

36W

SNT345

Output 12V-24V



12V/2.5A(3.8A) or 15V/2.0A(3.0A)
16V/2.0A(2.8A) or 18V/1.8A(2.5A)
19V/1.67A(2.4A) or 24V/1.3A(1.9A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.5*46.8*32.1mm

36W

UHVUx3036

Output 12V-36V



12V/2.5A~3.0A
15V/2.4A or 16V/2.2A or 18V/2.0A
24V/1.5A or 35V/1.0A or 36V/1.0A



- Stability
- Light weight
- Customized AC PIN base on different countries .

72.7*35.7*53.0mm

45W

UIA345

Output 12V-48V



12V/3.8A or 14V/3.21A
15V/3.0A or 16V/2.8A or 19V/2.4A
24V/1.9A or 35V/1.3A or 48V/0.9A



- Stability
- Light weight

95.9*43.8*28.5mm

45W

UIB345

Output 12V-48V



12V/3.8A or 14V/3.21A
15V/3.0A or 16V/2.8A or 19V/2.4A
24V/1.9A or 35V/1.3A or 48V/0.9A



- Stability
- Light weight

95.9*43.8*28.5mm

45W

UEC345-4804

Output 48V



48V/0.4A



- Stability
- Light weight

128.3*51.5*32.3mm

45W

UEC345-4808

Output 48V



48V/0.875A



- Stability
- Light weight

128.3*51.5*32.3mm

45W

UNI345

Output 12V-24V



12V/3.8A or 15V/3.0A or
16V/2.8A or 18V/2.5A or
19V/2.4A or 24V/1.9A



- Stability
- Light weight

98.5*46.8*32.1mm

45W

UNT345

Output 12V-24V



12V/3.8A or 15V/3.0A or
16V/2.8A or 18V/2.5A or
19V/2.4A or 24V/1.9A



- Stability
- Light weight

98.5*46.8*32.1mm

45W

SNI360

Output 12V-48V



12V/3.0A(4.0A) or 12V/3.2A(4.2A)
12V/3.8A(5.0A) or 15V/3.0A(4.0A)
16V/2.8A(3.7A) or 18V/2.5A(3.3A)
24V/1.9A(2.5A) or 48V/0.93A(1.2A)



- -20°C~60°C
Operating Temperature
- Stability
- Light weight

113.5*54.0*36.3mm

45W

SNB360

Output 12V-48V



12V/3.0A(4.0A) or 12V/3.2A(4.2A)
12V/3.8A(5.0A) or 15V/3.0A(4.0A)
16V/2.8A(3.7A) or 18V/2.5A(3.3A)
24V/1.9A(2.5A) or 48V/0.93A(1.2A)



- -20°C~60°C
Operating Temperature
- Stability
- Light weight

113.5*54.0*36.3mm

45W

SNC360

Output 12V-48V



12V/3.0A(4.0A) or 12V/3.2A(4.2A)
12V/3.8A(5.0A) or 15V/3.0A(4.0A)
16V/2.8A(3.7A) or 18V/2.5A(3.3A)
24V/1.9A(2.5A) or 48V/0.93A(1.2A)



- -20°C~60°C
Operating Temperature
- Stability
- Light weight

116.3*54.0*36.3mm

60W

UEA360

Output 12V-24V



12V/4.0A~4.2A~5.0A
15V/4.0A or 18V/3.3A or
24V/2.5A



- Stability
- Light weight

113.5*54.0*36.3mm

60W

UEB360

Output 12-24V



12V/4.0A~4.2A~5.0A
15V/4.0A or 18V/3.3A or
24V/2.5A



- Stability
- Light weight

113.5*54.0*36.3mm

60W

UEC360

Output 12V-24V



12V/4.0A~4.2A~5.0A
15V/4.0A or 18V/3.3A or
24V/2.5A



- Stability
- Light weight

116.3*54.0*36.3mm

60W

UNI360

Output 12V-24V



12V/4.0A~4.2A~5.0A or
15V/4.0A or 16V/3.75A
18V/3.33A or 24V/2.5A



- Stability
- Light weight

113.5*54.0*36.3mm

60W

UNB360

Output 12V-24V



12V/4.0A~4.2A~5.0A or
15V/4.0A or 16V/3.75A
18V/3.33A or 24V/2.5A



- Stability
- Light weight

113.5*54.0*36.3mm

60W

UNC360

Output 12V-24V



12V/4.0A~4.2A~5.0A or
15V/4.0A or 16V/3.75A
18V/3.33A or 24V/2.5A



- Stability
- Light weight

116.3*54.0*36.3mm

70W

UEA370

Output 12V-24V



12V/6.0A or 19V/3.8A or
24V/3.0A



- Stability

136.5*57.0*30.5mm

70W

UEB370

Output 12V-24V



12V/6.0A or 19V/3.8A or
24V/3.0A



- Stability

136.5*57.0*30.5mm

90W

UEA390

Output 12V-24V



12V/7.5A or 16V/5.5A
19V/4.73A or 20V/4.5A
24V/3.75A



- Stability

136.5*57.0*34.0mm

90W

UEB390

Output 12V-24V



12V/7.5A or 16V/5.5A
19V/4.73A or 20V/4.5A
24V/3.75A



- Stability

136.5*57.0*34.0mm

90W

UNI390

Output 12V-24V



12V/7.5A or 19V/4.73A or
24V/3.75A



- Stability

136.5*57.0*34.0mm

90W

UNB390

Output 12V-24V



12V/7.5A or 19V/4.73A or
24V/3.75A



- Stability

136.5*57.0*34.0mm

100W

UNI3100

Output 24V



24V/4.167A



- Stability

160.0*57.5*37.7mm

100W

UNB3100

Output 24V



24V/4.167A



- Stability

160.0*57.5*37.7mm

120W

UEC3120

Output 12V-24V



12V/10.0A or 15V/8.0A
19V/6.3A or 20V/6.0A
24V/5.0A



- Stability

174.7*72.3*35.1mm

160W

UIDDC3160

Output 12V-24V



12V/11.67A or 15V/9.3A or
20V/8.0A or 24V/6.67A



- Stability

174.7*72.3*35.1mm

More information please check on our website.

JAPAN TOKYO HEAD OFFICE 

UNIFIVE CO.,LTD.

1-12-6, Kandasuda-cho, Chiyoda-ku,
Tokyo, 101-0041, Japan
TEL: +81-3-5577-5436
FAX: +81-3-5577-5457
E-mail: info@unifive.com
URL: <http://www.unifive.com>

JAPAN OSAKA OFFICE 

UNIFIVE CO.,LTD.

Astro Building 301, 5-7-18, Nishinakajima,
Yodogawa-ku, Osaka-shi, Osaka, 532-0011, Japan
TEL: +81-6-6300-7851
FAX: +81-6-6300-7852
E-mail: info@unifive.com
URL: <http://www.unifive.com>

HONG KONG OFFICE 

UNIFIVE INTERNATIONAL LIMITED.

Suite 2408, 24/F., Tower2, Lippo Centre,
89 Queensway, Hong Kong
TEL: +852-3580-1337
E-mail: sakamaki@unifive.com
URL: <http://www.unifive.com>

KOREA OFFICE 

UNIFIVE KOREA CO.,LTD.

Ba-4116 Chungang Circulation Complex 15
Gyeonginro 53-Gi, Guro-Gu, Seoul, 08217, Korea
TEL: +82-2-2611-7655
FAX: +82-2-2611-7657
E-mail: Kang@unifive.co.kr
URL: <http://www.unifive.com.tw/kr/index.aspx>

TAIWAN R&D CENTER 

UNIFIVE TECHNOLOGY CO.,LTD.

6F,-14, No.12, Ln. 609, Sec. 5, Chongxin Rd.,
Sanchong Dist., New Taipei City, 241, Taiwan
TEL: +886-4-2382-8806
FAX: +886-4-2382-8606
E-mail: inquiry@unifive.com.tw
URL: <http://www.unifive.com.tw>

TAIWAN OFFICE 

UNIFIVE TECHNOLOGY CO.,LTD.

No. 149-20, Longfu 18th RD.,
Nantun Dist., Taichung City 408, Taiwan
TEL: +886-4-2382-8806
FAX: +886-4-2382-8606
E-mail: inquiry@unifive.com.tw
URL: <http://www.unifive.com.tw>

CHINA FACTORY 

UNIFIVE TECHNOLOGY (SHEN ZHEN) CO.,LTD.

No. 101, 201, 301, Building E, DaTianYang Industrial Zone,
LongMen Village, HongXing, SongGang Street, BaoAn
District, ShenZhen, Guangdong, P.R.518105, China.
TEL: +86-755-3387-0193
FAX: +86-755-3387-0191
E-mail: powell@unifive.cn
URL: <http://www.unifive.com.tw/cn/index.aspx>

USA OFFICE 

UNIFIVE CO.,LTD.

18022 Cowan, Suite 200 Irvine, CA 92614.
TEL: +1-949-260-9602
FAX: +1-949-260-9218
E-mail: info@unifive-us.com
URL: <http://www.unifive.com/en>