



# AC/DC Adapter

---

Safe, Efficient & Earth Friendly

---

UNIFIVE

# OUR PRINCIPLE



## SAFE



## EARTH FRIENDLY



## EFFICIENT



## About UNIFIVE

Since 1989, UNIFIVE has been known for its "high quality and high reliability" and is involved in the market of AC/DC power supplies (Adapter and Open Frame etc.).

We are committed to research and development of products that meet the increasingly sophisticated electronics industry and are widely used in computers, home appliances, consumer electronics, communications, information, industry, medical and other fields. We also has patent for 360 degree AC PIN interchangeable type adaptor and it is leading the world's exclusive design.

UNIFIVE provides products which are smaller, lighter, more power efficient, and easier to use. We selling products all over the world and get the certifications for each of country. And also acquired ISO9001:2015 and ISO14001:2015 etc. to ensure products meet the latest regulations.

### Customized Solution

In additional to provide customer standard adaptor, UNIFIVE also strives to provide unique product, customized service with various, high quality and regulation to satisfied customer's special requested.



### Experience Team

UNIFIVE has been established for 30 years, has great development experience in switching power supply and also has the most professional service team. We will continue to work with customers to create competitive products.




***Understand your needs and do our best!***

## Typical model

Power Rating	Input Voltage	Output Voltage
5W-160W	90V-264V	3V-48V

## Safety

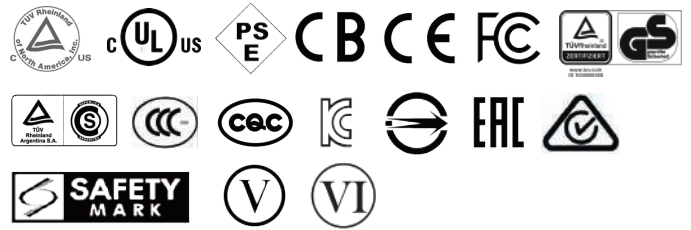

5W

UZI105

Output 5V



5V/1.0A



- Stability
- Ultra small size

75.0\*50.6\*29.8mm

5W

UZ305

Output 5V



5V/1.0A



- Stability
- Ultra small size

63.9\*49.5\*29.5mm

5W

UW305

Output 5V



5V/0.5A or 5V/1.0A



- Stability
- Ultra small size
- AC PIN Fold

52.6\*38.8\*17.5mm

6W

UVx305

Output 5V-24V



5V/0.5A~1.0A or  
5.9V/0.85A~1.0A or 6V/0.5A  
7V/0.5A or 7.5V/0.8A  
8V/0.6A or 9V/0.5A or 12V/0.5A  
13V/0.45A or 24V/0.2A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

59.0\*28.0\*37.6mm

6W

UCx305

Output 3V-12V



3V/1.0A or 5V/0.8A~1.0A  
9V/0.5A or 12V/0.25A~0.5A



- Low cost
- Ultra small size
- Customized AC PIN base on different countries .

45.8\*33.3\*25.4mm

6W

UNx305

Output 5V-12V



5V/0.5A~1.0A or  
5.6V/0.5A~0.6A or  
9V/0.5A or 12V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

45.8\*33.3\*25.4mm

**6W**

**SV313**

**Output 5V-24V**



5V/2.0A(1.2A) or 5.9V/1.8A(1.0A)  
9V/1.3A(0.65A) or 12V/1.0A(0.5A)  
24V/0.5A(0.25A)



- -20°C~60°C Operating Temperature
- Light weight
- Customized AC PIN base on different countries .

59.0\*28.0\*37.6mm

**10W**

**UUx311**

**Output 5V-24V**



5V/2.0A or 7.5V/1.6A or 9V/1.3A  
9.5V/1.0A or 12V/1.0A or  
15V/0.8A or 24V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

70.0\*35.0\*44.0mm

**10W**

**UVx313**

**Output 5V-24V**



5V/2.0A or 9V/1.0A or 9V/1.3A  
12V/1.0A or 24V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

59.0\*28.0\*37.6mm

**10W**

**UW310**

**Output 5V**



5V/1.0A or 5V/1.5A  
5V/2.0A or 5V/2.1A



- Stability
- Ultra small size
- AC PIN Fold

53.3\*38.0\*21.8mm

**10W**

**LMx310**

**Output 5V-12V**



5V/2.0A or 12V/1.0A



- Stability
- Customized AC PIN base on different countries .

Ø48.0\*25.0mm

**10W**

**UCx310**

**Output 5V-24V**



5V/1.2A~1.5A~2.0A or  
5.3V/1.5A or 9V/1.3A  
12V/0.8A~1.0A or 24V/0.5A



- Low cost
- Ultra small size
- Customized AC PIN base on different countries .

60.0\*44.0\*30.0mm

**12W**

**UAx310**

**Output 5V-24V**



5V/1.2A~2.0A  
12V/1.0A or 24V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

45.8\*33.3\*25.4mm

**12W**

**UNx312**

**Output 5V-24V**



5V/2.0A or 5.9V/2.0A or  
9V/1.3A or 12V/1.0A or  
24V/0.5A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

63.9\*49.5\*29.5mm

**12W**

**UNI312**

**Output 5V-24V**



5V/2.0A or 5.9V/2.0A or  
9V/1.3A or 12V/1.0A  
24V/0.5A



- Stability
- Light weight

75.0\*50.6\*29.8mm

**12W**

**UNT312**

**Output 5V-24V**



5V/2.0A or 5.9V/2.0A or  
9V/1.3A or 12V/1.0A  
24V/0.5A



- Stability
- Light weight

75.0\*50.6\*29.8mm

**12W**

**USx30**

**Output 3V-18V**



3V/2.0A or 3.3V/2.0A or 5V/2.0A  
6V/1.8A or 7.5V/1.6A or 9V/1.3A  
12V/1.0A or 15V/0.8A or  
18V/0.65A



- Stability
- Light weight
- Customized AC PIN base on different countries .

60.0\*44.0\*30.0mm

**12W**

**USx312**

**Output 3V-24V**



3V/2.0A or 3.3V/2.0A  
5V/2.0A~2.3A or 5.5V/2.0A  
7V/1.4A~1.6A or 7.5V/1.6A  
9V/1.3A or 12V/1.0A  
15V/0.8A or 24V/0.5A



- Stability
- Light weight
- Customized AC PIN base on different countries .

63.9\*49.5\*29.5mm

**12W**

**UIA312**

**Output 5V-24V**



5V/2.0A~2.3A or 5.5V/2.0A  
7V/1.4A~1.6A or 7.5V/1.6A  
9V/1.3A or 12V/1.0A  
15V/0.8A or 24V/0.5A



- Stability
- Light weight

68.2\*49.8\*26.3mm

**12W**

**UIT312**

**Output 5V-24V**



5V/2.0A~2.3A or 5.5V/2.0A  
7V/1.4A~1.6A or 7.5V/1.6A  
9V/1.3A or 12V/1.0A  
15V/0.8A or 24V/0.5A



- Stability
- Light weight

68.2\*49.8\*26.3mm

**12W**

**SUx318**

**Output 5V-48V**



5V/3.0A(2.0A) or 5.9V/2.5A(2.0A)  
9V/2.0A(1.45A) or 12V/1.5A(1.0A)  
15V/1.2A(0.8A) or 24V/0.75A(0.5A)  
48V/0.4A(0.25A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

70.0\*35.0\*48.0mm

**15W**

**USx315**

**Output 5V-48V**



5V/2.5A or 7.5V/2.0A or 9V/1.6A  
12V/1.25A or 15V/1.0A  
24V/0.65A or 48V/0.3A



- Stability
- Light weight
- Customized AC PIN base on different countries .

63.9\*49.5\*29.5mm

**15W**

**UNx315**

**Output 5V-48V**



5V/2.5A or 5.9V/2.3A or 9V/1.6A  
12V/1.25A or 15V/1.0A  
24V/0.65A or 48V/0.3A



- Stability
- Ultra small size
- Customized AC PIN base on different countries .

63.9\*49.5\*29.5mm

**15W**

**UNI315**

**Output 5V-48V**



5V/2.5A or 5.9V/2.3A or 9V/1.6A  
12V/1.25A or 15V/1.0A  
24V/0.65A or 48V/0.3A



- Stability
- Light weight

75.0\*50.6\*29.8mm

**15W**

**UNT315**

**Output 5V-48V**



5V/2.5A or 5.9V/2.3A or 9V/1.6A  
12V/1.25A or 15V/1.0A  
24V/0.65A or 48V/0.3A



- Stability
- Light weight

75.0\*50.6\*29.8mm

**15W**

**UI315**

**Output 5V-48V**



5V/2.5A or 7.5V/2.0A or 9V/1.6A  
12V/1.25A or 15V/1.0A  
24V/0.65A or 48V/0.3A



- Stability
- Light weight

68.2\*49.8\*26.3mm

**15W**

**UIT315**

**Output 5V-48V**



5V/2.5A or 7.5V/2.0A or 9V/1.6A  
12V/1.25A or 15V/1.0A  
24V/0.65A or 48V/0.3A



- Stability
- Light weight

68.2\*49.8\*26.3mm

**18W**

**USx318**

**Output 5V-48V**



5V/2.6A~3.0A or 5.9V/2.8A  
9V/2.0A or 12V/1.5A or 15V/1.2A  
24V/0.75A or 48V/0.4A



- Stability
- Light weight
- Customized AC PIN base on different countries .

63.9\*49.5\*29.5mm

**18W**

**UNx318**

**Output 5V-48V**



5V/2.6A~3.0A or 5.5V/3.0A  
5.9V/2.8A or 6V/2.8A or 9V/2.0A  
12V/1.5A or 15V/1.2A  
24V/0.75A or 48V/0.4A



- Stability
- Light weight
- Customized AC PIN base on different countries .

63.9\*49.5\*29.5mm

**18W**

**UUx318**

**Output 5V-48V**



5V/2.0A~3.0A or 5.9V/2.8A  
9V/2.0A or 12V/1.25A~1.5A  
15V/1.2A or 24V/0.75A  
48V/0.4A



- Stability
- Low cost
- Customized AC PIN base on different countries .

70.0\*35.0\*48.0mm

**18W**

**UNI318**

**Output 5V-48V**



5V/2.6A~3.0A or 5.5V/3.0A  
5.9V/2.8A or 9V/2.0A  
12V/1.5A or 15V/1.2A  
24V/0.75A or 48V/0.4A



- Stability
- Light weight

75.0\*50.6\*29.8mm

**18W**

**UNT318**

**Output 5V-48V**



5V/2.6A~3.0A or 5.5V/3.0A  
5.9V/2.8A or 9V/2.0A  
12V/1.5A or 15V/1.2A  
24V/0.75A or 48V/0.4A



- Stability
- Light weight

75.0\*50.6\*29.8mm

**18W**

**UI318**

**Output 5V-48V**



5V/2.0A~2.6A or 5V/3.0A  
9V/2.0A or 12V/1.5A or 15V/1.2A  
24V/0.75A or 48V/0.4A



- Stability
- Light weight

68.2\*49.8\*26.3mm

**18W**

**UIT318**

**Output 5V-48V**



5V/2.0A~2.6A or 5V/3.0A  
9V/2.0A or 12V/1.5A or 15V/1.2A  
24V/0.75A or 48V/0.4A



- Stability
- Light weight

68.2\*49.8\*26.3mm

**18W**

**SNI324**

**Output 9V-24V**



9V/2.6A(2.0A) or 12V/2.0A(1.5A)  
15V/1.6A(1.2A) or 18V/1.3A(1.0A)  
24V/1.0A(0.65A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.8\*46.8\*32.1mm

**18W**

**SNT324**

**Output 9V-24V**



9V/2.6A(2.0A) or 12V/2.0A(1.5A)  
15V/1.6A(1.2A) or 18V/1.3A(1.0A)  
24V/1.0A(0.65A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.8\*46.8\*32.1mm

**18W**

**SVx324**

**Output 5V-24V**



5V/3.0A(2.0A) or 6V/3.0A(2.0A)  
10V/2.4A(1.8A) or 10.5V/1.1A(1.1A)  
12V/1.5A(1.5A) or 12V/2.0A(1.5A)  
19V/1.2A(1.0A) or 24V/1.0A(0.75A)



- -20°C~60°C Operating Temperature
- Light weight
- Customized AC PIN base on different countries .

72.7\*35.7\*53.0mm

**24W**

**USx324**

**Output 5V-25V**



5V/4.0A~3.0A or 25V/1.0A



- Stability
- Light weight
- Customized AC PIN base on different countries .

93.0\*50.0\*33.0mm

**24W**

**UUx324**

**Output 5V-24V**



5V/2.0A-3.0A or 9V/2.0A  
12V/1.25A-1.5A-2.0A or  
24V/1.0A



- Stability
- Low cost
- Customized AC PIN base on different countries .

72.7\*35.7\*53.0mm

**24W**

**UVx324**

**Output 5V-24V**



5V/3.0A or 6V/3.0A or 10V/2.4A  
10.5V/1.1A or 12V/1.5A-2.0A  
19V/1.2A or 24V/1.0A



- Stability
- Low cost
- Customized AC PIN base on different countries .

72.7\*35.7\*53.0mm

**24W**

**UIA324**

**Output 5V-24V**



5V/4.0A or 7V/3.4A or 9V/2.6A  
10V/2.4A or 12V/2.0A or  
15V/1.6A or 18V/1.3A or  
24V/1.0A



- Stability
- Light weight

95.9\*43.8\*28.5mm

**24W**

**UIB324**

**Output 5V-24V**



5V/4.0A or 7V/3.4A or 9V/2.6A  
10V/2.4A or 12V/2.0A or  
15V/1.6A or 18V/1.3A or  
24V/1.0A



- Stability
- Light weight

98.8\*46.8\*32.1mm

**24W**

**UNI324**

**Output 9V-24V**



9V/2.6A or 12V/2.0A  
15V/1.6A or 18V/1.3A  
24V/1.0A



- Stability
- Light weight

98.8\*46.8\*32.1mm

**24W**

**UNT324**

**Output 9V-24V**



9V/2.6A or 12V/2.0A or  
15V/1.6A or 18V/1.3A or  
24V/1.0A



- Stability
- Light weight

98.8\*46.8\*32.1mm

**24W**

**SNI336**

**Output 12V-24V**



12V/3.0A(2.0A) or 15V/2.4A(1.6A)  
24V/1.5A(1.0A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.5\*46.8\*32.1mm

**24W**

**SNT336**

**Output 12V-24V**



12V/3.0A(2.0A) or 15V/2.4A(1.6A)  
24V/1.5A(1.0A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.5\*46.8\*32.1mm



**24W**

**SVx336**

**Output 12V-36V**



12V/3.0A(2.0A) or 15V/2.4A(1.6A)  
16V/2.2A(1.5A) or 18V/2.0A(1.4A)  
24V/1.5A(1.0A) or 35V/1.0A(0.68A)  
36V/1.0A(0.66A)



- -20°C~60°C Operating Temperature
- Light weight
- Customized AC PIN base on different countries .

72.7\*35.7\*53.0mm

**30W**

**UZA130**

**Output 12V**



12V/2.1A or 12V/2.5A



- Stability
- Light weight

113.5\*54.0\*36.3mm

**36W**

**UUx336**

**Output 12V-35V**



12V/3.0A or 15V/2.4A  
16V/2.2A or 18V/2.0A  
24V/1.5A or 35V/1.0A



- Stability
- Light weight
- Customized AC PIN base on different countries .

72.7\*35.7\*53.0mm

**36W**

**UVx336**

**Output 12V-36V**



12V/3.0A or 15V/2.4A or 16V/2.2A  
18V/2.0A or 24V/1.5A  
35V/1.0A or 36V/1.0A



- Stability
- Low cost
- Customized AC PIN base on different countries .

72.7\*35.7\*53.0mm

**36W**

**UIA336**

**Output 12V-35V**



12V/2.0A~3.0A or 24V/1.5A or 35V/1.0A



- Stability
- Light weight

95.9\*43.8\*28.5mm

**36W**

**UIB336**

**Output 12V-35V**



12V/2.0A~3.0A or 24V/1.5A or 35V/1.0A



- Stability
- Light weight

98.8\*46.8\*32.1mm

**36W**

**UNI336**

**Output 12V-24V**



12V/3.0A or 15V/2.4V or 24V/1.5A



- Stability
- Light weight

98.5\*46.8\*32.1mm

**36W**

**UNT336**

**Output 12V-24V**



12V/3.0A or 15V/2.4A  
24V/1.5A



- Stability
- Light weight

98.5\*46.8\*32.1mm

**36W**

**SNI345**

**Output 12V-24V**



12V/3.8A(2.5A) or 15V/3.0A(2.0A)  
16V/2.8A(2.0A) or 18V/2.5A(1.8A)  
19V/2.4A(1.67A) or 24V/1.9A(1.3A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.5\*46.8\*32.1mm

**36W**

**SNT345**

**Output 12V-24V**



12V/3.8A(2.5A) or 15V/3.0A(2.0A)  
16V/2.8A(2.0A) or 18V/2.5A(1.8A)  
19V/2.4A(1.67A) or 24V/1.9A(1.3A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

98.5\*46.8\*32.1mm

**45W**

**UIA345**

**Output 12V-48V**



12V/3.8A or 14V/3.21A  
15V/3.0A or 16V/2.8A or 19V/2.4A  
24V/1.9A or 35V/1.3A or 48V/0.9A



- Stability
- Light weight

95.9\*43.8\*28.5mm

**45W**

**UIB345**

**Output 12V-48V**



12V/3.8A or 14V/3.21A  
15V/3.0A or 16V/2.8A or 19V/2.4A  
24V/1.9A or 35V/1.3A or 48V/0.9A



- Stability
- Light weight

95.9\*43.8\*28.5mm

**45W**

**UEC345-4804**

**Output 48V**



48V/0.4A



- Stability
- Light weight

128.3\*51.5\*32.3mm

**45W**

**UEC345-4808**

**Output 48V**



48V/0.875A



- Stability
- Light weight

128.3\*51.5\*32.3mm

**45W**

**UNI345**

**Output 12V-24V**



12V/3.8A or 15V/3.0A or  
16V/2.8A or 18V/2.5A or  
19V/2.4A or 24V/1.9A



- Stability
- Light weight

98.5\*46.8\*32.1mm

**45W**

**UNT345**

**Output 12V-24V**



12V/3.8A or 15V/3.0A or  
16V/2.8A or 18V/2.5A or  
19V/2.4A or 24V/1.9A



- Stability
- Light weight

98.5\*46.8\*32.1mm

**45W**

**SNI360**

**Output 12V-48V**



12V/4.0A(3.0A) or 12V/4.2A(3.2A)  
 12V/5.0A(3.8A) or 15V/4.0A(3.0A)  
 16V/3.7A(2.8A) or 18V/3.3A(2.5A)  
 24V/2.5A(1.9A) or 48V/1.2A(0.93A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

113.5\*54.0\*36.3mm

**45W**

**SNB360**

**Output 12V-48V**



12V/4.0A(3.0A) or 12V/4.2A(3.2A)  
 12V/5.0A(3.8A) or 15V/4.0A(3.0A)  
 16V/3.7A(2.8A) or 18V/3.3A(2.5A)  
 24V/2.5A(1.9A) or 48V/1.2A(0.93A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

113.5\*54.0\*36.3mm

**45W**

**SNC360**

**Output 12V-48V**



12V/4.0A(3.0A) or 12V/4.2A(3.2A)  
 12V/5.0A(3.8A) or 15V/4.0A(3.0A)  
 16V/3.7A(2.8A) or 18V/3.3A(2.5A)  
 24V/2.5A(1.9A) or 48V/1.2A(0.93A)



- -20°C~60°C Operating Temperature
- Stability
- Light weight

116.3\*54.0\*36.3mm

**60W**

**UEA360**

**Output 12V-24V**



12V/4.0A~4.2A~5.0A  
 15V/4.0A or 18V/3.3A or  
 24V/2.5A



- Stability
- Light weight

113.5\*54.0\*36.3mm

**60W**

**UEB360**

**Output 12-24V**



12V/4.0A~4.2A~5.0A  
 15V/4.0A or 18V/3.3A or  
 24V/2.5A



- Stability
- Light weight

113.5\*54.0\*36.3mm

**60W**

**UEC360**

**Output 12V-24V**



12V/4.0A~4.2A~5.0A  
 15V/4.0A or 18V/3.3A or  
 24V/2.5A



- Stability
- Light weight

116.3\*54.0\*36.3mm

**60W**

**UNI360**

**Output 12V-24V**



12V/4.0A~4.2A~5.0A or  
 15V/4.0A or 16V/3.75A  
 18V/3.33A or 24V/2.5A



- Stability
- Light weight

113.5\*54.0\*36.3mm

**60W**

**UNB360**

**Output 12V-24V**



12V/4.0A~4.2A~5.0A or  
 15V/4.0A or 16V/3.75A  
 18V/3.33A or 24V/2.5A



- Stability
- Light weight

113.5\*54.0\*36.3mm

**60W**    **UNC360**    **Output 12V-24V**



12V/4.0A~4.2A~5.0A or  
15V/4.0A or 16V/3.75A  
18V/3.33A or 24V/2.5A



- Stability
- Light weight

116.3\*54.0\*36.3mm

**70W**    **UEA370**    **Output 12V-24V**



12V/6.0A or 19V/3.8A or  
24V/3.0A



- Stability

136.5\*57.0\*30.5mm

**70W**    **UEB370**    **Output 12V-24V**



12V/6.0A or 19V/3.8A or  
24V/3.0A



- Stability

136.5\*57.0\*30.5mm

**90W**    **UEA390**    **Output 12V-24V**



12V/7.5A or 16V/5.5A  
19V/4.73A or 20V/4.5A  
24V/3.75A



- Stability

136.5\*57.0\*34.0mm

**90W**    **UEB390**    **Output 12V-24V**



12V/7.5A or 16V/5.5A  
19V/4.73A or 20V/4.5A  
24V/3.75A



- Stability

136.5\*57.0\*34.0mm

**90W**    **UNI390**    **Output 12V-24V**



12V/7.5A or 19V/4.73A or  
24V/3.75A



- Stability

136.5\*57.0\*34.0mm

**90W**    **UNB390**    **Output 12V-24V**



12V/7.5A or 19V/4.73A or  
24V/3.75A



- Stability

136.5\*57.0\*34.0mm

**100W**    **UNI3100**    **Output 24V**



24V/4.167A



- Stability

160.0\*57.5\*37.7mm

**100W**

**UNB3100**

**Output 24V**



24V/4.167A



- Stability

160.0\*57.5\*37.7mm

**120W**

**UEC3120**

**Output 12V-24V**



12V/10.0A or 15V/8.0A

19V/6.3A or 20V/6.0A

24V/5.0A



- Stability

174.7\*72.3\*35.1mm

**160W**

**UIDDC3160**

**Output 12V-24V**



12V/11.67A or 15V/9.3A or

20V/8.0A or 24V/6.67A



- Stability

174.7\*72.3\*35.1mm

More information please check on our website.

**JAPAN TOKYO HEAD OFFICE** 

**UNIFIVE CO.,LTD.**

1-12-6, Kandasuda-cho, Chiyoda-ku,  
Tokyo, 101-0041, Japan  
TEL: +81-3-5577-5436  
FAX: +81-3-5577-5457  
E-mail: info@unifive.com  
URL: <http://www.unifive.com>

**JAPAN OSAKA OFFICE** 

**UNIFIVE CO.,LTD.**

Astro Building 301, 5-7-18, Nishinakajima,  
Yodogawa-ku, Osaka-shi, Osaka, 532-0011, Japan  
TEL: +81-6-6300-7851  
FAX: +81-6-6300-7852  
E-mail: info@unifive.com  
URL: <http://www.unifive.com>

**HONG KONG OFFICE** 

**UNIFIVE INTERNATIONAL LIMITED.**

Suite 2408, 24/F., Tower2, Lippo Centre,  
89 Queensway, Hong Kong  
TEL: +852-3580-1337  
E-mail: sakamaki@unifive.com  
URL: <http://www.unifive.com>

**KOREA OFFICE** 

**UNIFIVE KOREA CO.,LTD.**

Ba-4116 Chungang Circulation Complex 15  
Gyeonginro 53-Gi, Guro-Gu, Seoul, 08217, Korea  
TEL: +82-2-2611-7655  
FAX: +82-2-2611-7657  
E-mail: Kang@unifive.co.kr  
URL: <http://www.unifive.com.tw/kr/index.aspx>

**TAIWAN R&D CENTER** 

**UNIFIVE TECHNOLOGY CO.,LTD.**

6F,-14, No.12, Ln. 609, Sec. 5, Chongxin Rd.,  
Sanchong Dist., New Taipei City, 241, Taiwan  
TEL: +886-4-2382-8806  
FAX: +886-4-2382-8606  
E-mail: inquiry@unifive.com.tw  
URL: <http://www.unifive.com.tw>

**TAIWAN OFFICE** 

**UNIFIVE TECHNOLOGY CO.,LTD.**

No. 149-20, Longfu 18th RD.,  
Nantun Dist., Taichung City 408, Taiwan  
TEL: +886-4-2382-8806  
FAX: +886-4-2382-8606  
E-mail: inquiry@unifive.com.tw  
URL: <http://www.unifive.com.tw>

**CHINA FACTORY** 

**UNIFIVE TECHNOLOGY (SHEN ZHEN) CO.,LTD.**

No. 101, 201, 301, Building E, DaTianYang Industrial Zone,  
LongMen Village, HongXing, SongGang Street, BaoAn  
District, ShenZhen, Guangdong, P.R.518105, China.  
TEL: +86-755-3387-0193  
FAX: +86-755-3387-0191  
E-mail: powell@unifive.cn  
URL: <http://www.unifive.com.tw/cn/index.aspx>

**USA OFFICE** 

**UNIFIVE CO.,LTD.**

18022 Cowan, Suite 200 Irvine, CA 92614.  
TEL: +1-949-260-9602  
FAX: +1-949-260-9218  
E-mail: info@unifive-us.com  
URL: <http://www.unifive.com/en>