

UC 6W Series

I.T.E./AV AC/DC Adaptor



▲ UC105/UC305



▲ UCY305



▲ UCL105/UCL305



▲ UCZ305



▲ UCE305



▲ UCR305



▲ UCK305



■ Please contact our sales department for safety standard of each model.



Safety Certificate



Reliability Guarantee



Energy Saving



ROHS 2



LPS



EMC



Miniaturization

Product Highlights

- Low Cost
- Ultra Small Size
- Light Weight
- Energy Efficiency
- Suit LED Lighting, Display or Photo Frame, Network and USB Devices

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Safety Standard

- 60950-1
- 62368-1
- PSE 別表第八

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC Part 15 Class B
- CE CISPR 32 Class B
- VCCI Class B
- BS EN 55032

Immunity

- EN 55035
- BS EN 55035

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

No.	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	5.0V	0.8A	±5%	300mV	300mV	71.90%	0.1W	
2	5.0V	1.0A	±5%	300mV	300mV	73.62%	0.1W	
3	9.0V	0.5A	±5%	300mV	300mV	77.05%	0.1W	
4	12.0V	0.25A	±5%	240mV	240mV	74.38%	0.1W	
5	12.0V	0.5A	±5%	300mV	300mV	78.88%	0.1W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

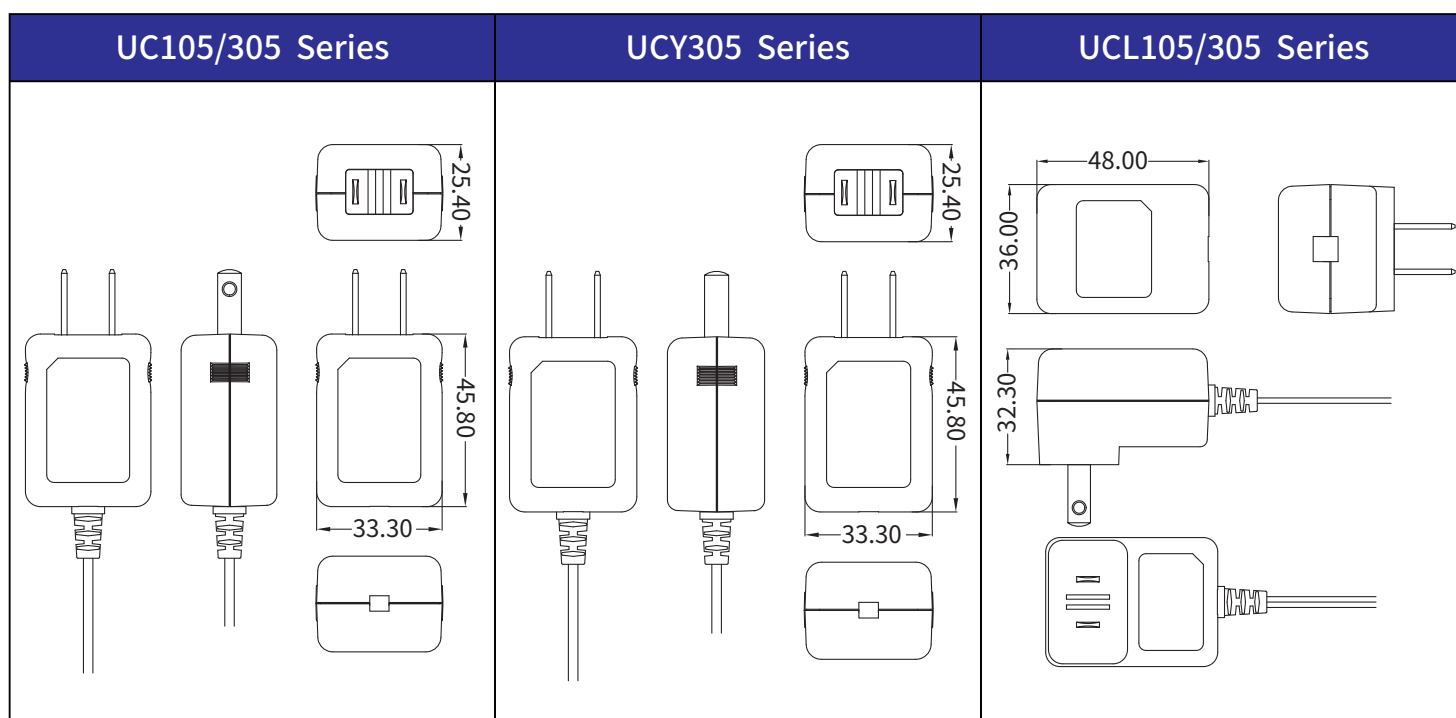

Mechanical Spec

UCZ305 Series	UCE305 Series	UCR305 Series
UCK305 Series		

— the following blank —

■ Please contact our sales department for details of each model ■