

UHDV 65W P Series


Home Electronics and Appliances AC/DC Adaptor Peak Power



▲ UHDVI3065-XXXXXXPA



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Energy and High Efficiency
- LED Display (Optional)
- Peak load 1 sec function
- Peak load is 170% rating output at most.
- Suitable for printers/motors/pump/amplifier products
- Suitable for home appliances
- Suitable for equipment which meet 60335

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection (Optional)

Safety Standard

- 61558-1
- PSE 別表第八

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC
 - FCC Part15-B
- CE
 - EN(CISPR)55014-B
- VCCI-B
- BS EN55014-1

Immunity

- EN55014-2
 - BS EN55014-2
- The above specifications include the following test standards
- ✓ EN61000-4-2
 - ✓ EN61000-4-3
 - ✓ EN61000-4-4
 - ✓ EN61000-4-5
 - ✓ EN61000-4-6
 - ✓ EN61000-4-11

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	DC Output Peak Current	Time (sec)	Average Active Efficiency	No-Load Power Consumption	Option / Remark
UHDVI3065-240027PA	24.0V	2.7A	±5%	240mV	480mV	4.5A	1sec	88.00%	0.21W	
UHDVI3065-280023PA	28.0V	2.3A	±5%	240mV	480mV	3.8A	1sec	88.00%	0.21W	
UHDVI3065-300021PA	30.0V	2.15A	±5%	240mV	480mV	3.6A	1sec	88.00%	0.21W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

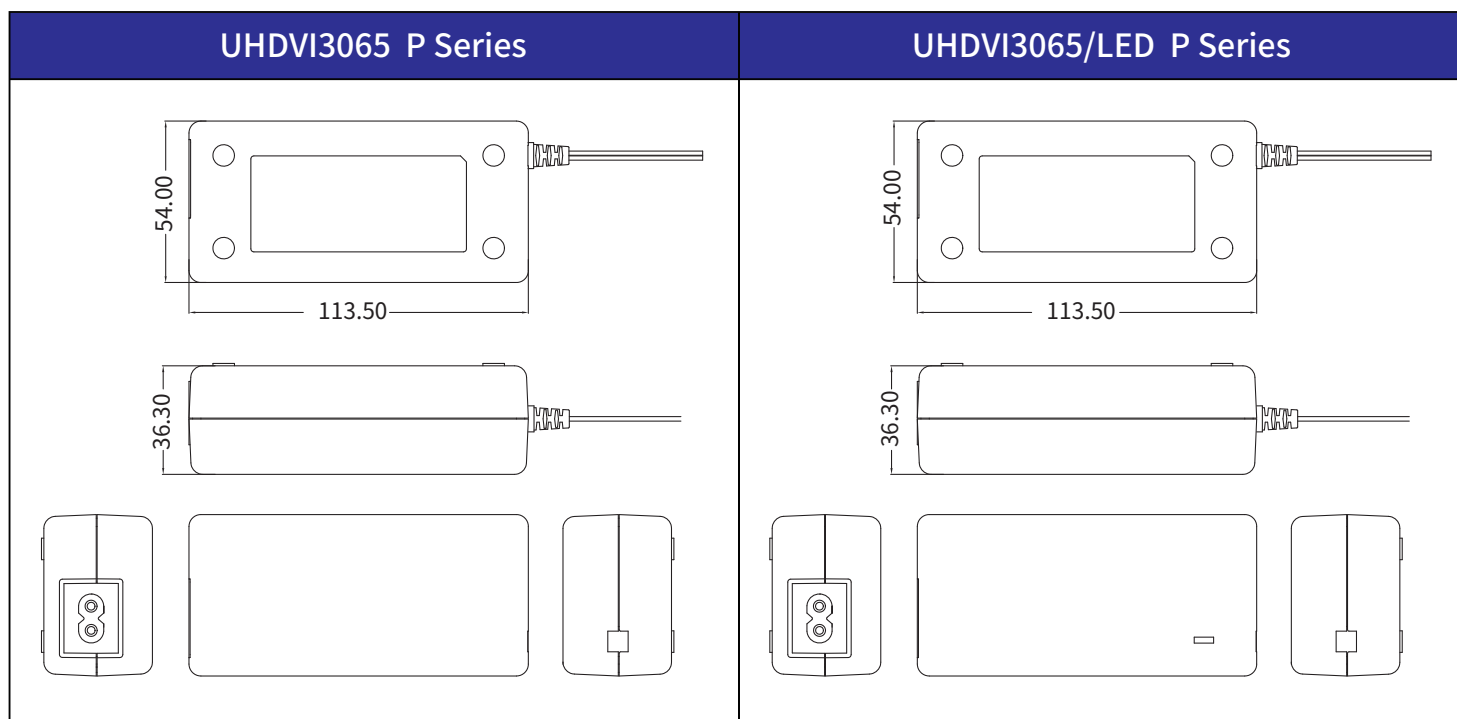

■ Please contact our sales department for details of each model ■