

UHVU 10W Series

Home Electronics and Appliances AC/DC Adaptor Standard Product



▲ UHVUU3010



▲ UHVUZ3010



▲ UHVUE3010



▲ UHVUK3010



▲ UHVUA3010



▲ UHVUR3010



▲ UHVUF3010



▲ UHVUG3010



▲ UHVUL3010



■ Please contact our sales department for safety standard of each model.



Safety Certificate



Reliability Guarantee



Energy Saving



RoHS 2



LPS



EMC



Household

Product Highlights

- Stability
- Energy and High Efficiency
- Suitable for home appliances
- Suitable for equipment which meet 60335

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Emissions

- FCC
 - FCC Part15-B
- CE
 - EN(CISPR)55014-B
- VCCI-B
- BS EN55014-1

Safety Standard

- 61558-1
- 60335-1
- PSE 別表第八

Immunity

- EN55014-2
- BS EN55014-2

The above specifications include the following test standards

- ✓ EN61000-4-2
- ✓ EN61000-4-3
- ✓ EN61000-4-4
- ✓ EN61000-4-5
- ✓ EN61000-4-6
- ✓ EN61000-4-11

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection, Sea Level
Storage Temperature	-20	-	65	°C	Free Convection, Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing

Typical model list

Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option / Remark
UHVUx3010-033020SA	3.3V	2.0A	-5%~+8%	100mV	100mV	75.71%	0.1W	
UHVUx3010-059016SA	5.9V	1.6A	±5%	120mV	120mV	78.30%	0.1W	
UHVUx3010-090011SA	9.0V	1.1A	±5%	180mV	180mV	81.89%	0.1W	
UHVUx3010-100010SA	10.0V	1.0A	±5%	180mV	240mV	81.95%	0.1W	
UHVUx3010-120800SA	12.0V	0.8A	±5%	240mV	240mV	81.71%	0.1W	
UHVUx3010-150600SA	15.0V	0.6A	±5%	200mV	300mV	81.34%	0.1W	
UHVUx3010-240400SA	24.0V	0.4A	±5%	240mV	480mV	81.71%	0.1W	

■ Measurement Condition

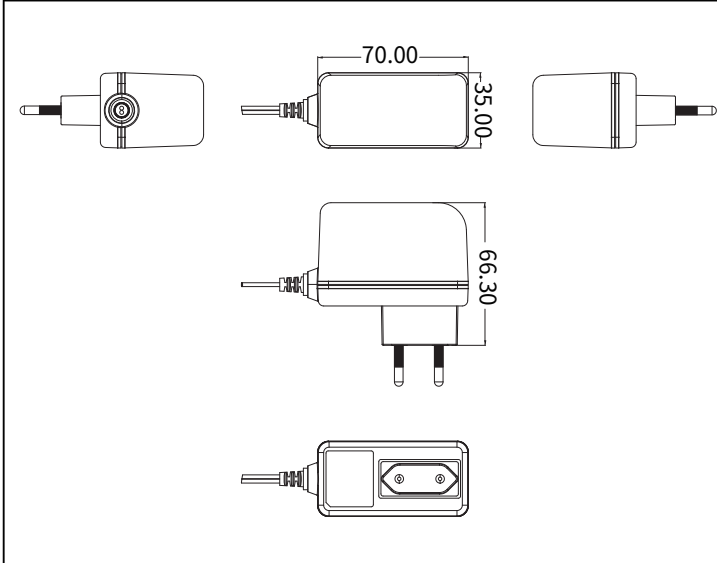
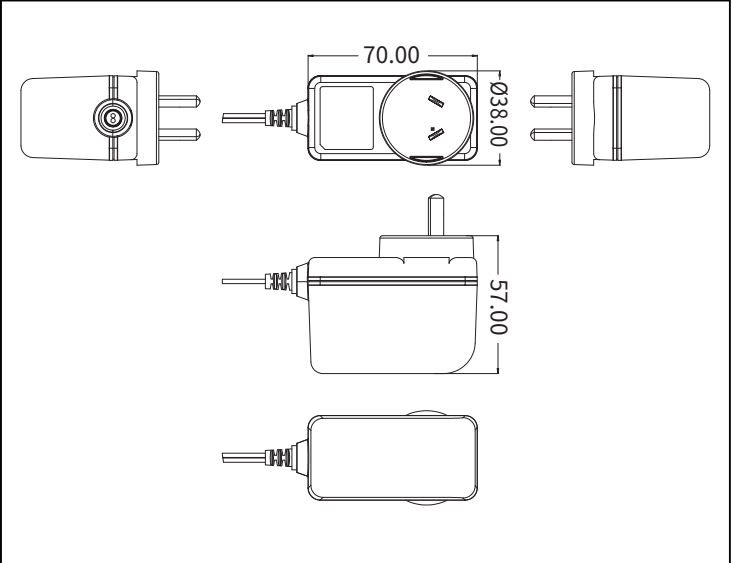
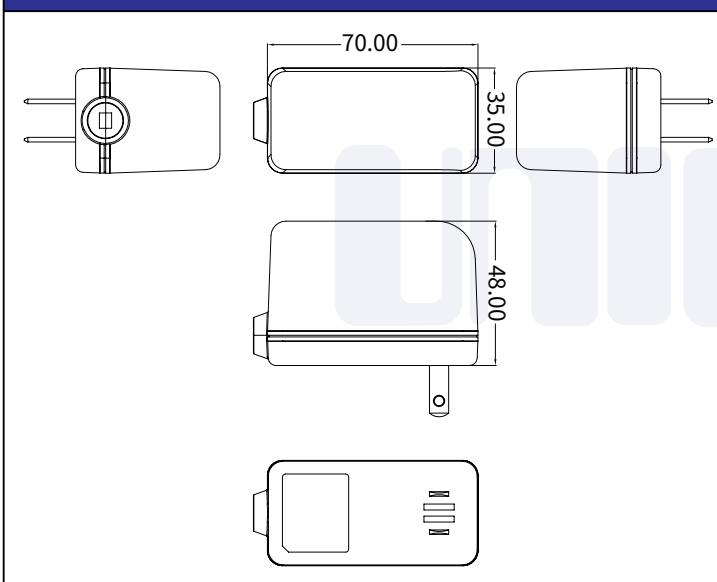
- Measurements shall be made with an oscilloscope with 20MHz bandwidth.
- Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

more detail on next page

Mechanical Spec

UHVUU3010 Series	UHVUZ3010 Series
UHVUE3010 Series	UHVUK3010 Series
UHVUA3010 Series	UHVUR3010 Series

Mechanical Spec

UHVUF3010 Series	UHVUG3010 Series
	
UHVUL3010 Series	
	

the following blank

■ Please contact our sales department for details of each model ■