

# UHVU 15W Series

## Home Electronics and Appliances AC/DC Adaptor



▲ UHVUU3015



▲ UHVUZ3015



▲ UHVUE3015



▲ UHVUL3015



▲ UHVUR3015



▲ UHVUA3015



▲ UHVUK3015



▲ UHVUF3015



▲ UHVUG3015



■ Please contact our sales department for safety standard of each model.



### Product Highlights

- Stability
- Energy Efficiency
- Electric Cooker, Fan, Air Conditioning, Air Purifier

### Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

### Safety Standard

- 61558-1
- PSE 別表第八

### Efficiency

- Energy Efficiency Level VI ( ErP / DoE )
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

### Emissions

- FCC Part 15 Class B
- VCCI Class B
- CE CISPR 14 EN55014-1
- BS EN55014-1

### Immunity

- EN55014-2
- BS EN55014-2

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection, Sea Level
Storage Temperature	-20	-	65	°C	Free Convection, Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing

## Typical model list

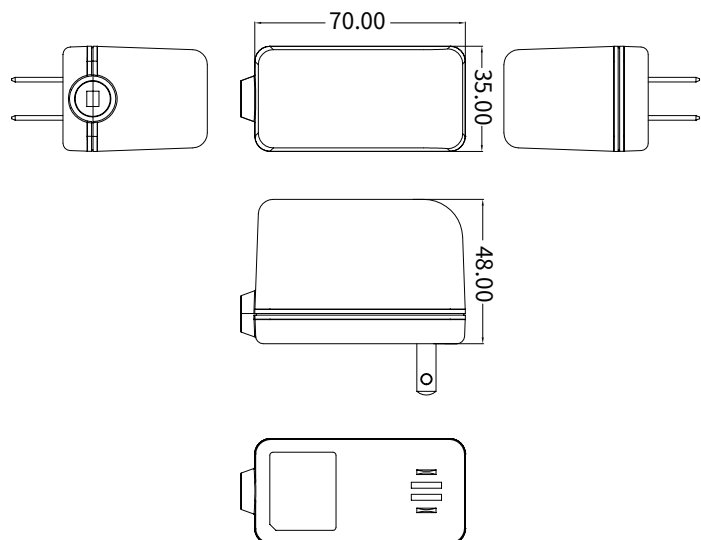
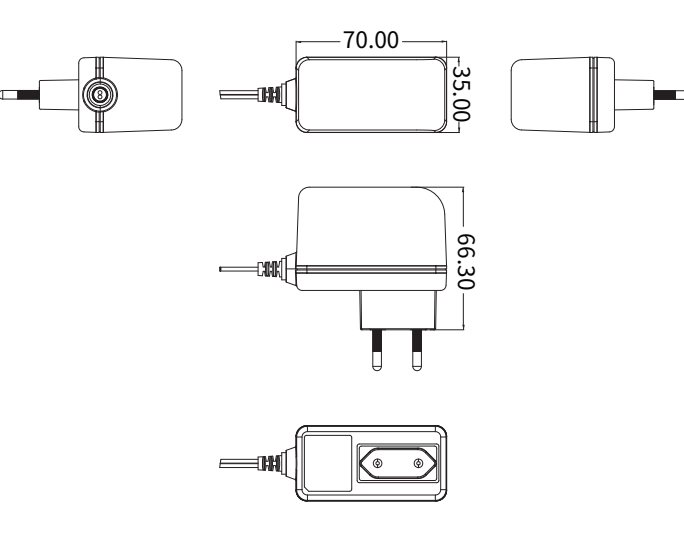
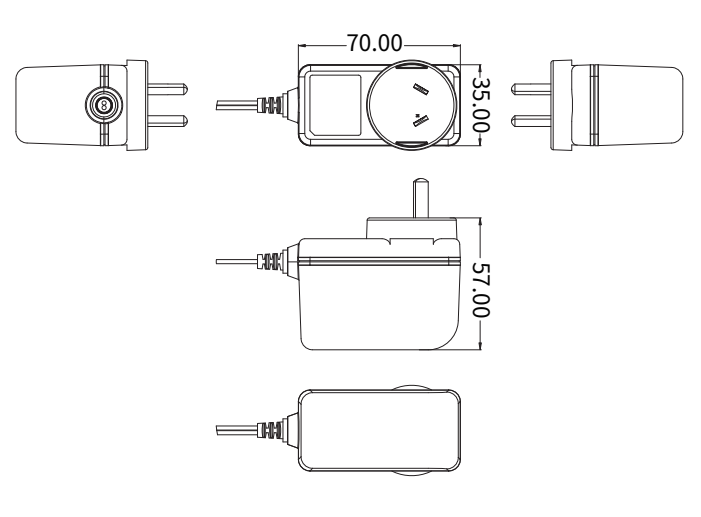
No.	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	3.3V	2.5A	-5%~+8%	100mV	150mV	77.34%	0.1W	
2	5.0V	2.5A	±5%	100mV	150mV	80.21%	0.1W	
3	5.5V	2.5A	±5%	100mV	150mV	80.83%	0.1W	
4	5.9V	2.3A	±5%	100mV	150mV	80.75%	0.1W	
5	7.5V	2.0A	±5%	100mV	150mV	84.13%	0.1W	
6	9.0V	1.6A	±5%	120mV	240mV	83.92%	0.1W	
7	12.0V	1.25A	±5%	120mV	240mV	84.13%	0.1W	
8	15.0V	1.0A	±5%	150mV	300mV	84.13%	0.1W	
9	18.0V	0.83A	±5%	150mV	300mV	83.92%	0.1W	
10	24.0V	0.65A	±5%	240mV	480mV	84.32%	0.1W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

more detail on next page

UHVUU3015 Series	UHVUZ3015 Series
<p>70.00 35.00 48.00</p>	<p>70.00 35.00 48.00</p>
UHVUE3015 Series	UHVUA3015 Series
<p>70.00 35.00 66.30</p>	<p>70.00 35.00 57.00</p>
UHVUK3015 Series	UHVUR3015 Series
<p>70.00 48.80 55.20</p>	<p>70.00 35.00 66.30</p>

UHVUL3015 Series	UHVUF3015 Series
 <p>Technical drawings of the UHVUL3015 Series AC/DC adaptor. The drawings show the front, side, and rear views. Dimensions are provided: width is 70.00, height is 35.00, and depth is 48.00. The front view shows a circular input port and two output pins. The side view shows the profile of the device. The rear view shows the output pins and a small label area.</p>	 <p>Technical drawings of the UHVUF3015 Series AC/DC adaptor. The drawings show the front, side, and rear views. Dimensions are provided: width is 70.00, height is 35.00, and depth is 66.30. The front view shows a circular input port and two output pins. The side view shows the profile of the device. The rear view shows the output pins and a small label area.</p>
UHVUG3015 Series	
 <p>Technical drawings of the UHVUG3015 Series AC/DC adaptor. The drawings show the front, side, and rear views. Dimensions are provided: width is 70.00, height is 35.00, and depth is 57.00. The front view shows a circular input port and two output pins. The side view shows the profile of the device. The rear view shows the output pins and a small label area.</p>	

— the following blank —

■ Please contact our sales department for details of each model ■