

UHVU 36W Series

Home Electronics and Appliances AC/DC Adaptor Standard Product



▲ UHVUU3036



▲ UHVUZ3036



▲ UHVUE3036



▲ UHVUK3036



▲ UHVUA3036



▲ UHVUF3036



▲ UHVUG3036



▲ UHVUR3036



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Energy and High Efficiency
- Suitable for home appliances
- Suitable for equipment which meet 60335

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection (Optional)

Emissions

- FCC
 - FCC Part15-B
- CE
 - EN(CISPR)55014-B
- VCCI-B
- CNS13438
- BS EN55014-1

Safety Standard

- 61558-1
- PSE 別表第八

Immunity

- EN55014-2
 - BS EN55014-2
- The above specifications include the following test standards
- ✓ EN61000-4-2
 - ✓ EN61000-4-3
 - ✓ EN61000-4-4
 - ✓ EN61000-4-5
 - ✓ EN61000-4-6
 - ✓ EN61000-4-11

Electrical Spec

Input						
Description	Min.	Typ.	Max.	Units	Comment	
Voltage	90	100~240	264	Vac		
Frequency	47	50/60	63	Hz		

Environmental						
Description	Min.	Typ.	Max.	Units	Comment	
Operating Temperature	0	-	40	°C	Free Convection,Sea Level	
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level	
Operating Humidity	5	-	95	%RH	No Condensing	
Storage Humidity	5	-	95	%RH	No Condensing	

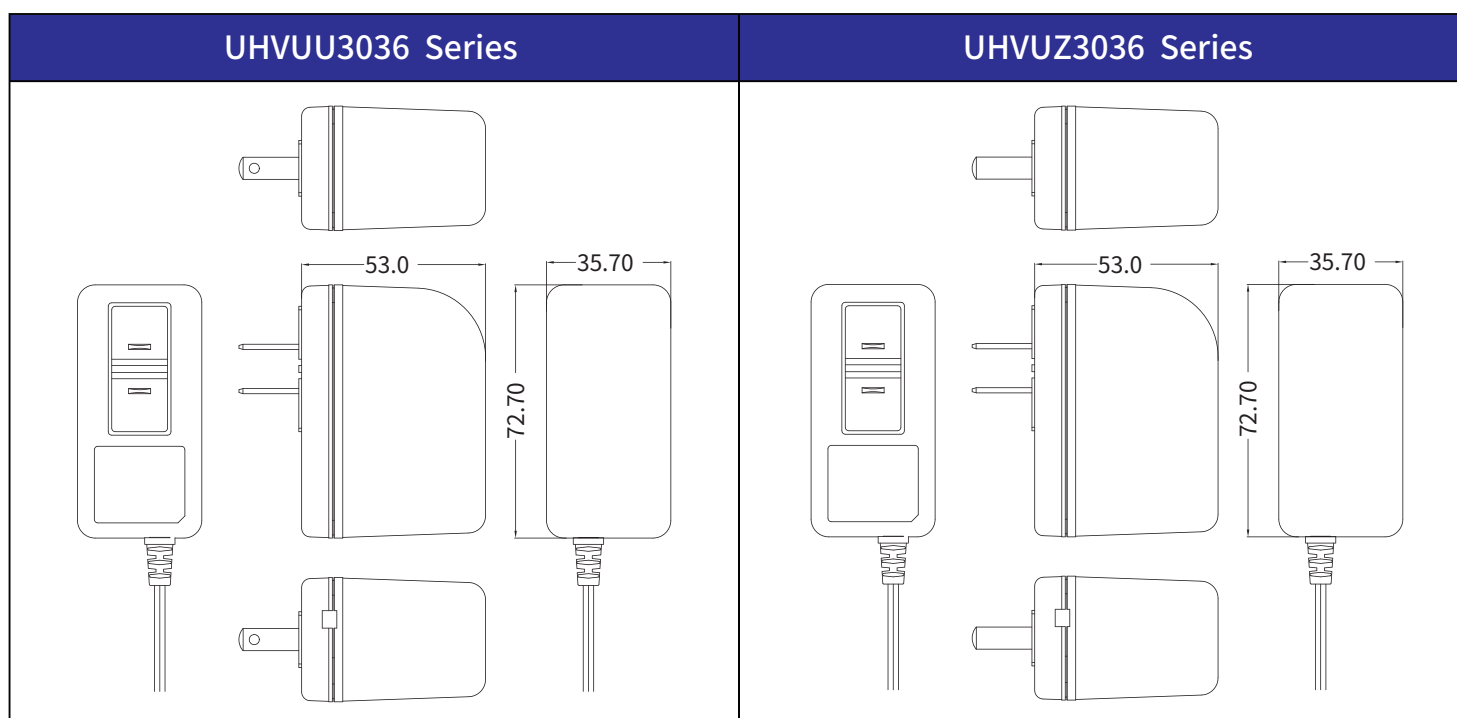
Typical model list

Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option / Remark
UHVUx3036-120025SA	12.0V	2.5A	±5%	240mV	240mV	86.95%	0.1W	
UHVUx3036-120030SA	12.0V	3.0A	±5%	240mV	240mV	87.40%	0.1W	
UHVUx3036-150024SA	15.0V	2.4A	±5%	240mV	240mV	87.40%	0.1W	
UHVUx3036-160022SA	16.0V	2.2A	±5%	240mV	240mV	87.36%	0.1W	
UHVUx3036-180020SA	18.0V	2.0A	±5%	240mV	240mV	87.40%	0.1W	
UHVUx3036-240015SA	24.0V	1.5A	±5%	240mV	240mV	87.40%	0.1W	
UHVUx3036-350010SA	35.0V	1.0A	±5%	240mV	240mV	87.34%	0.1W	
UHVUx3036-360010SA	36.0V	1.0A	±5%	240mV	240mV	87.40%	0.1W	

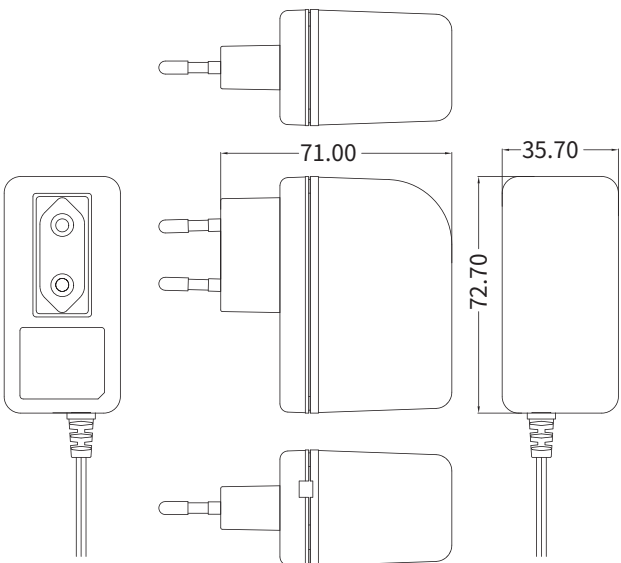
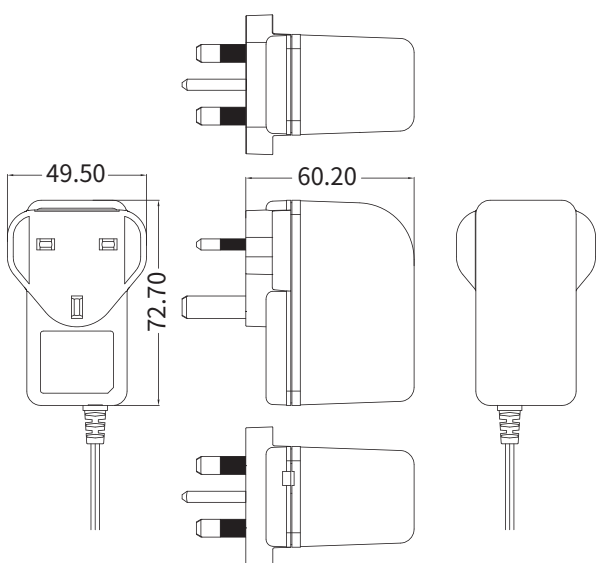
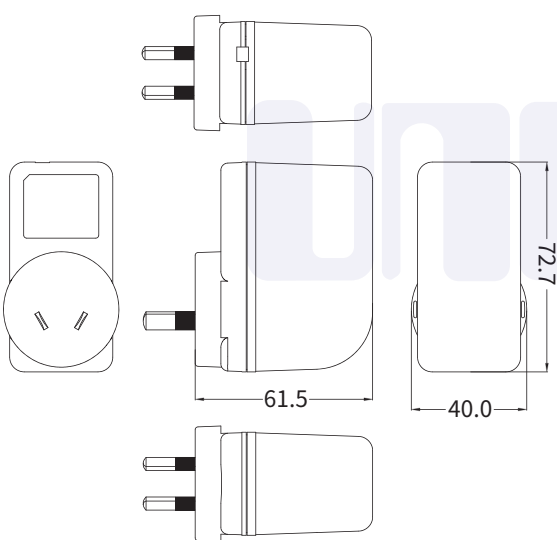
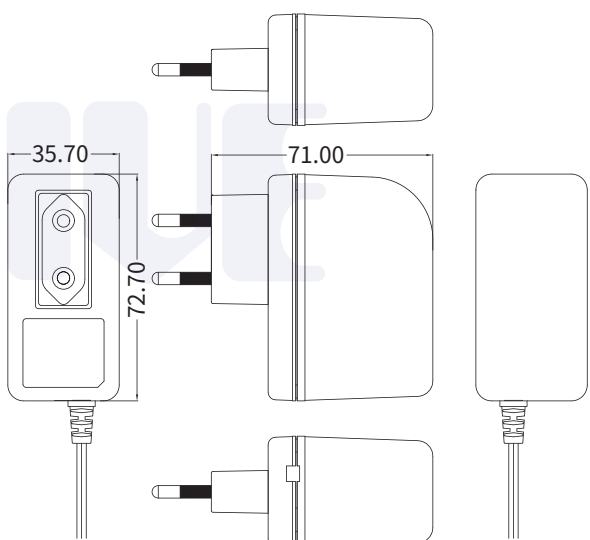
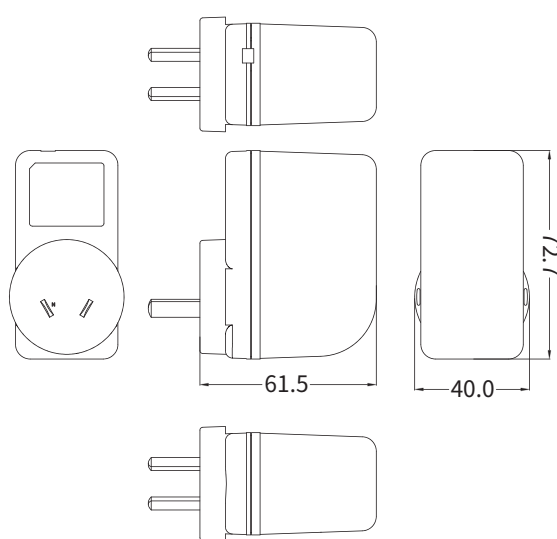
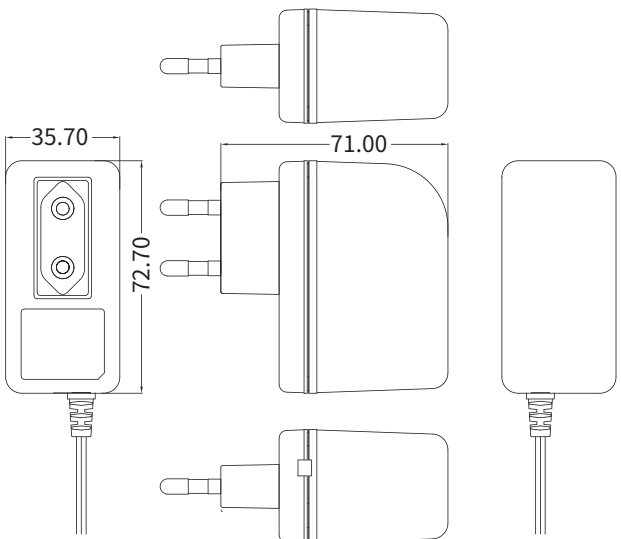
■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec



Mechanical Spec

UHVUE3036 Series	UHVUK3036 Series
	
UHVUA3036 Series	UHVUF3036 Series
	
UHVUG3036 Series	UHVUR3036 Series
	

■ Please contact our sales department for details of each model ■