

UMDE 45W P Series

Medical AC/DC Adaptor



▲ **UMDEI3045-XXXXXXPA**



▲ **UMDEB3045-XXXXXXPA**



▲ **UMDEC3045-XXXXXXPA**



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Energy Efficiency
- LED Display (Optional)
- For Amplifier Products/Printers/Voice Assistants/Motors/Pump
- Peak Load 11 Sec. Function
- The Peak Load is Twice Rating Current.(Max.)
- 2xMOPP/2xMOOP
- IEC/EN 60601-1-2

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection

Emissions

- FCC Part 18 Class B
- VCCI Class B
- CE CISPR11 EN55011
- BS EN55011

Safety Standard

- 60601-1
- PSE 別表第八

Immunity

- EN60601-1-2
- BS EN60601-1-2

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

No.	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	12.0V	3.8A	±5%	150mV	300mV	-	-	
2	15.0V	3.0A	±5%	240mV	300mV	-	-	
3	19.0V	2.3A	±5%	240mV	300mV	-	-	
4	24.0V	1.8A	±5%	240mV	480mV	-	-	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

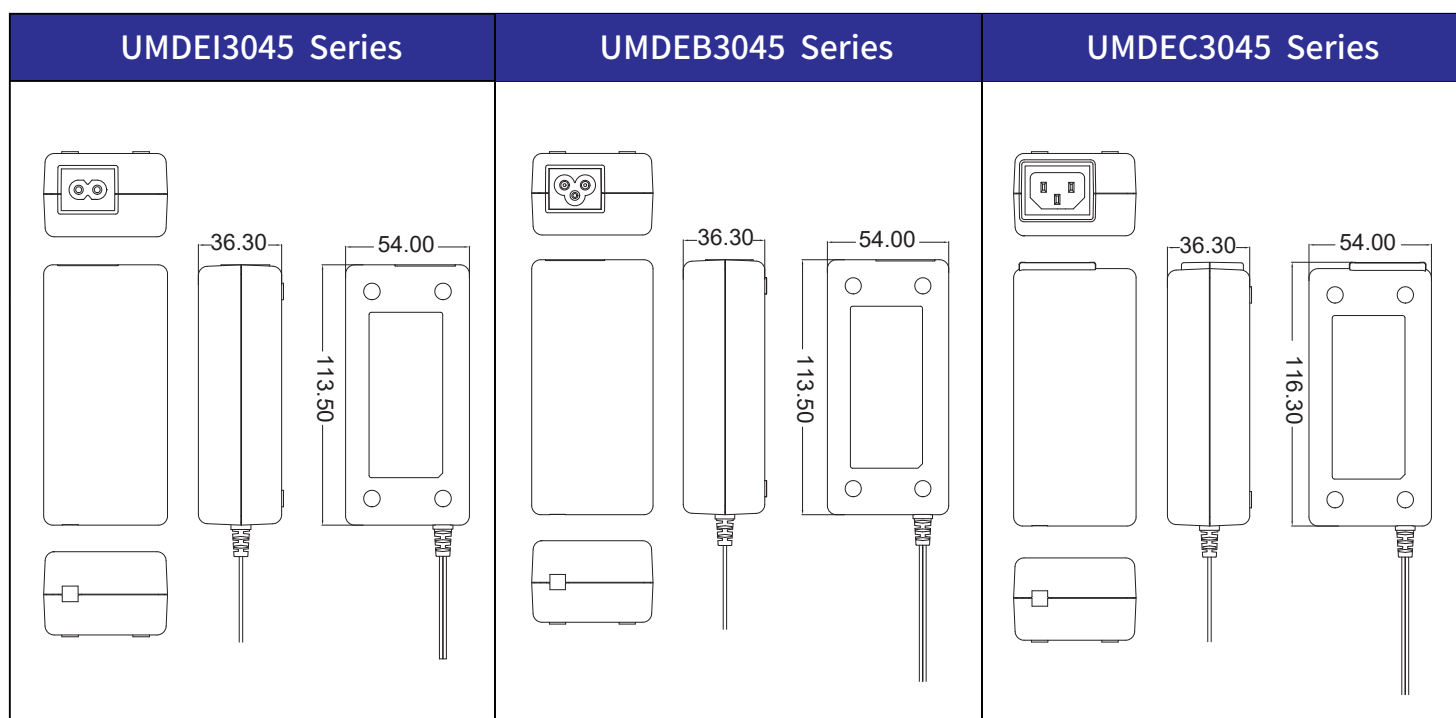

■ Please contact our sales department for details of each model ■

Mechanical Spec

UMDEI3045/LED Series	UMDEB3045/LED Series	UMDEC3045/LED Series

■ Please contact our sales department for details of each model ■