


UOF 15W Series

Open Frame Switching Power Supply



▲ UOF315

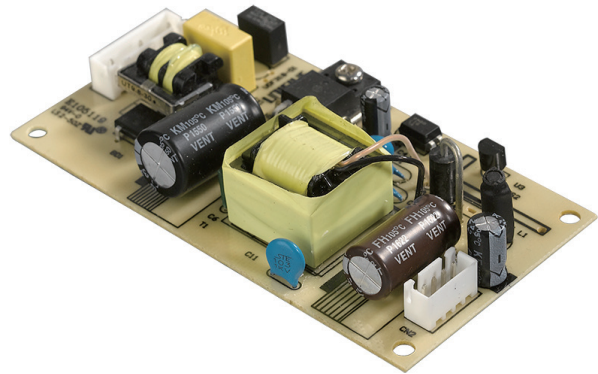

■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Ultra Small Size
- Energy Efficiency
- Appendix 8 of PSE :
Comply with Non-Dusty Requirement.

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Safety Standard

- 60065-1
- 60950-1
- 62368-1

Emissions

- CE CISPR 32 EN55032
- FCC Part15 Class B
- BS EN 55032

Immunity

- EN 55035
- BS EN 55035

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	50	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

Output Port	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	Option/Remark
CN2	12.0V	1.25A	±5%	120mV	120mV	80.0%	
	15.0V	1.0A	±5%	150mV	300mV	80.0%	
	24.0V	0.65A	±5%	240mV	240mV	80.0%	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

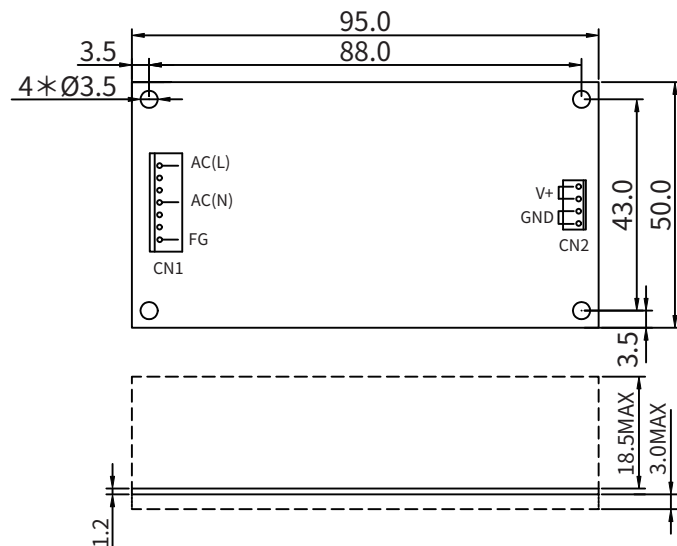


TOLERANCE: ±0.5
Unit:mm

CN1


PIN NUMBER	INPUT
1	AC(L)
2	AC(N)
3	AC(FG)

CN1 : INPUT CONNECTION
MODEL NO : JSW 7PIN P=2.5 PIN 2,3,5,6 無
(THE EQUIVALENT)

CN1



CN2



CN2

PIN NUMBER	OUTPUT
1,2	V+
3,4	GND

CN2 : OUTPUT CONNECTION
MODEL NO : JSW 4PIN A2501WV-4P
P=2.5mm
(THE EQUIVALENT)

■ Please contact our sales department for details of each model ■