

UU Series

Wall Mount AC/DC Adaptor

36W Series



▲ UU336



▲ UUE336



▲ UUK336



▲ UUZ336



▲ UUA336



▲ UUR336



▲ UUG336



▲ UUF336



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Mobility
- Compact size
- Light weight
- Suit small to mid size hand held computer, LCD display, etc.

Protection

- Short circuit protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection (optional)

Safety Approvals

- PSE
- IEC/EN60950-1

Efficiency

- Meet : Commission Regulation (EC) No 278/2009 (ERP 5)& CEC 5

Emissions

- CE CISPR 22 Class B
- VCCI Class B

Immunity

- EN55024/A1:2001

Electrical Spec Absolute Maximum Rating

Input						
Description	Min	Typ	Max	Units	Comment	
Voltage	90	100~240	264	Vac		
Frequency	47	50/60	63	Hz		

Environmental						
Description	Min	Typ	Max	Units	Comment	
Operating Temperature	0	-	40	°C	Free Convection,Sea level	
Storage Temperature	-20	-	65	°C	Free Convection,Sea level	
Operating Humidity	5	-	95	%RH	No Condensing	
Storage Humidity	5	-	95	%RH	No Condensing	

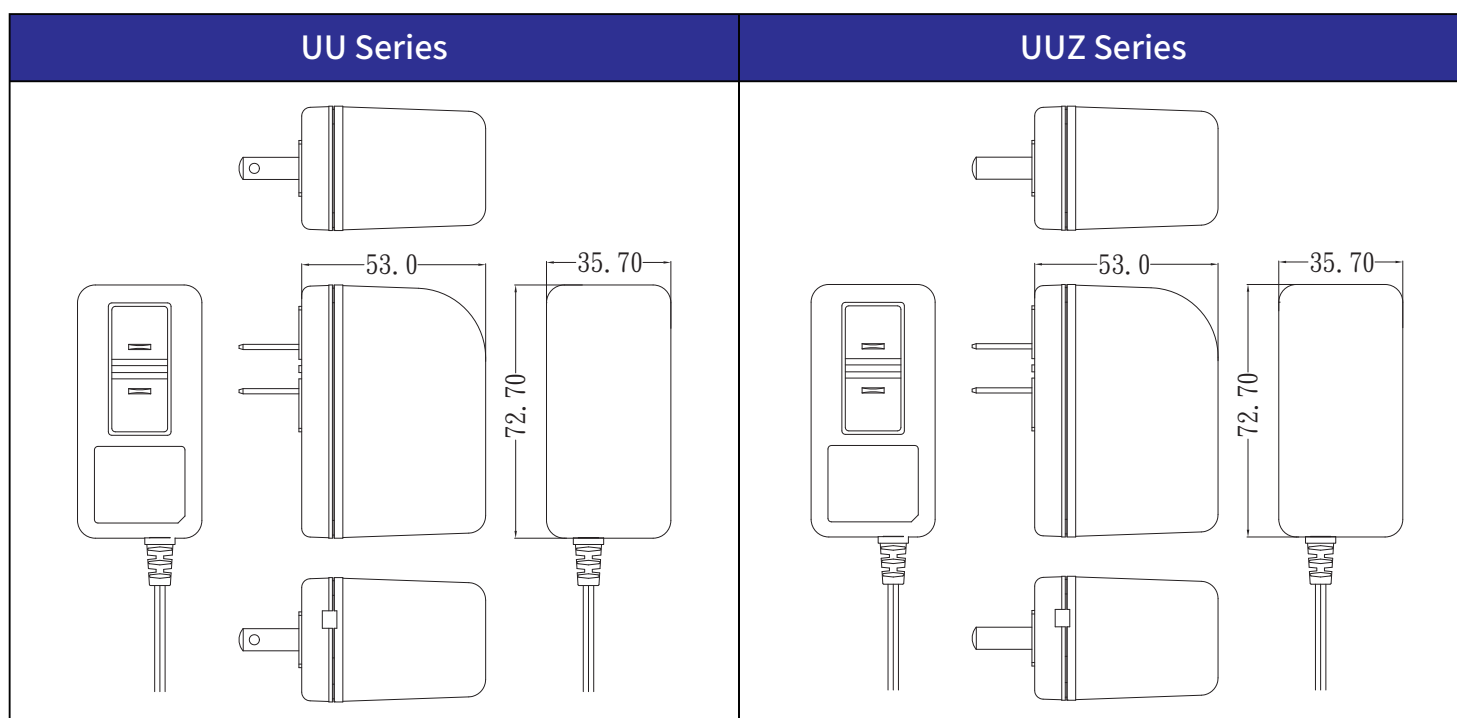
Typical model list

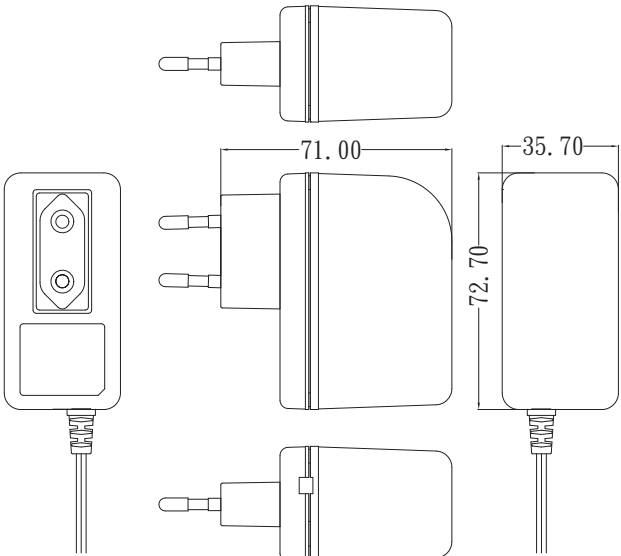
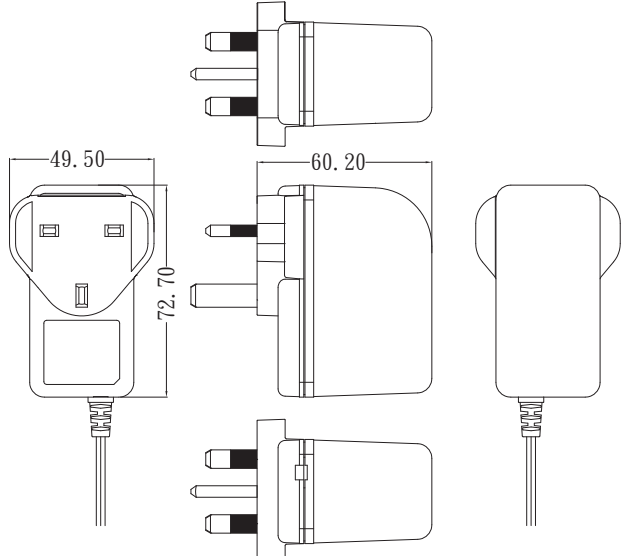
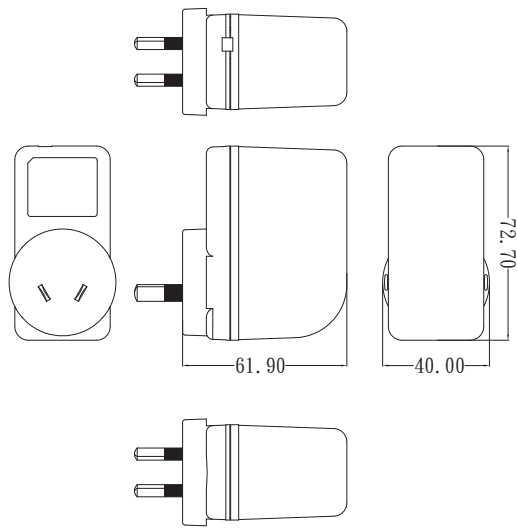
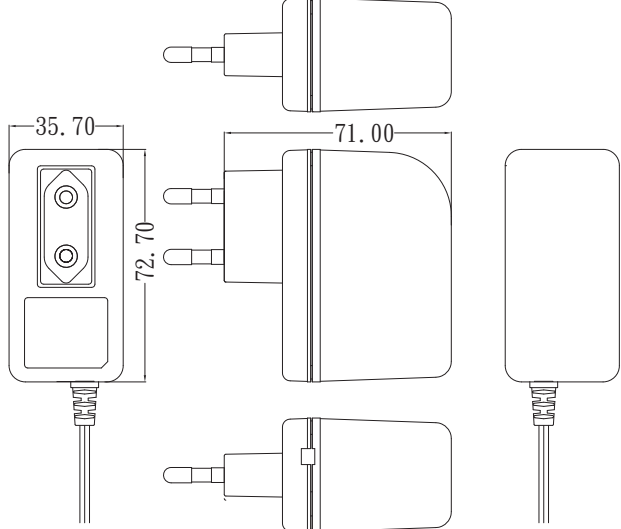
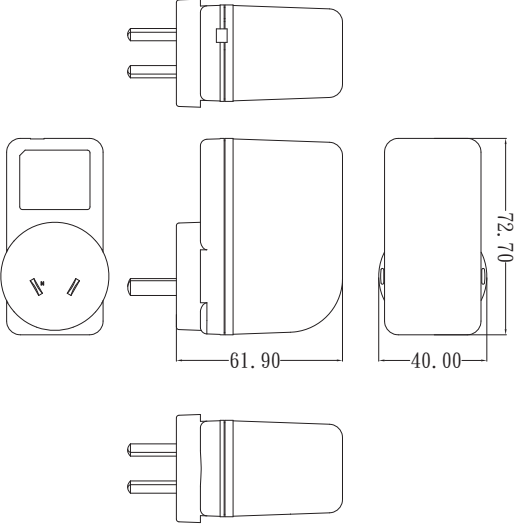
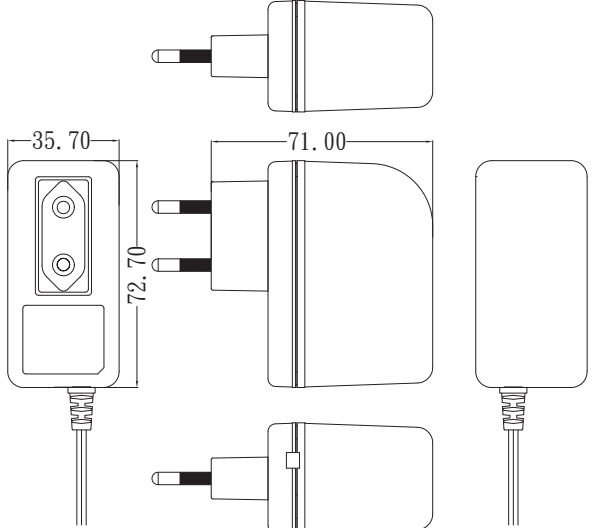
Input Condition	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noises	Regulation		Option/Remark	
						Line	Load		
Input Voltage: 90V-264Vac Frequency: 47-63Hz	1	12.0V	3.0A	±5%	240mV	240mV	2%	10%	
	2	15.0V	2.4A	±5%	300mV	300mV	2%	10%	
	3	16.0V	2.2A	±5%	240mV	240mV	2%	10%	
	4	18.0V	2.0A	±5%	240mV	240mV	2%	10%	
	5	24.0V	1.5A	±5%	300mV	300mV	2%	10%	
	6	33.0V	1.1A	±5%	330mV	660mV	2%	10%	
	7	35.0V	1.0A	±5%	280mV	280mV	2%	10%	◎

■ Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.
3. "◎" NO PSE Certification.

Mechanical Spec



UUE Series	UUK Series
	
UUA Series	UUR Series
	
UUG Series	UUF Series
	

■ Please contact our sales department for details of each model ■