

# UHDE 120W Series

## Home Electronics and Appliances AC/DC Adaptor



▲ UHDET3120



■ Please contact our sales department for safety standard of each model.



### Product Highlights

- Stability
- Energy Efficiency
- Electric Cooker, Fan, Air Conditioning, Air Purifier

### Protection

- Short circuit protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection (Optional)

### Safety Standard

- 61558-1
- PSE 別表第八

### Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

### Emissions

- FCC Part15 Class B
- VCCI Class B
- CE CISPR 14 EN55014-1

### Immunity

- EN55014-2

## Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


## Typical model list

No.	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	12.0V	10.0A	±5%	150mV	240mV	88.00%	0.21W	
2	15.0V	8.0A	±5%	150mV	240mV	88.00%	0.21W	
3	19.0V	6.3A	±5%	190mV	360mV	88.00%	0.21W	
4	24.0V	5.0A	±5%	240mV	480mV	88.00%	0.21W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

## Mechanical Spec

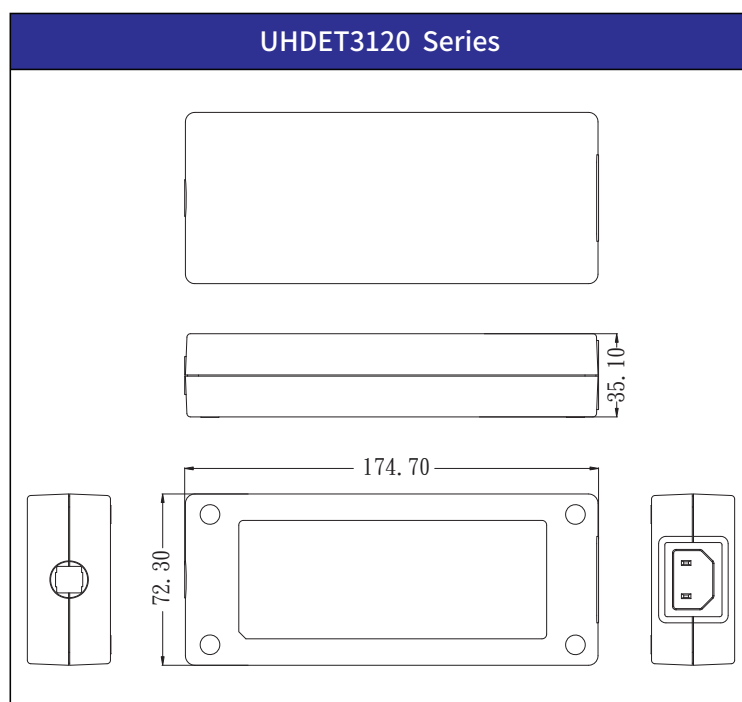

■ Please contact our sales department for details of each model ■