

UMUS 8W Series

Medical AC/DC Adaptor



▲ **UMUSU3008**



▲ **UMUSY3008**



▲ **UMUSE3008**



▲ **UMUSR3008**



▲ **UMUSA3008**



▲ **UMUSK3008**



■ Please contact our sales department for safety standard of each model.



Safety Certificate



Reliability Guarantee



Energy Saving



RoHS 2



LPS



EMC



Medical Certification

Product Highlights

- Stability
- Compact Size
- Energy Efficiency
- Suit Medical Equipment, Health Device
- 2xMOPP/2xMOOP
- IEC/EN 60601-1-2

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Safety Standard

- 60601-1
- PSE 別表第八

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC Part18 Class B
- CE CISPR 11 EN55011
- VCCI Class B
- BS EN55011

Immunity

- EN60601-1-2
- BS EN60601-1-2

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

No.	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	5.0V	1.6A	±5%	150mV	240mV	-	-	
2	9.0V	1.0A	±5%	150mV	240mV	-	-	
3	12.0V	0.7A	±5%	150mV	240mV	-	-	
4	15.0V	0.55A	±5%	150mV	240mV	-	-	
5	18.0V	0.45A	±5%	150mV	240mV	-	-	
6	24.0V	0.35A	±5%	150mV	240mV	-	-	

■ Measurement Condition

- Measurements shall be made with an oscilloscope with 20MHz bandwidth.
- Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

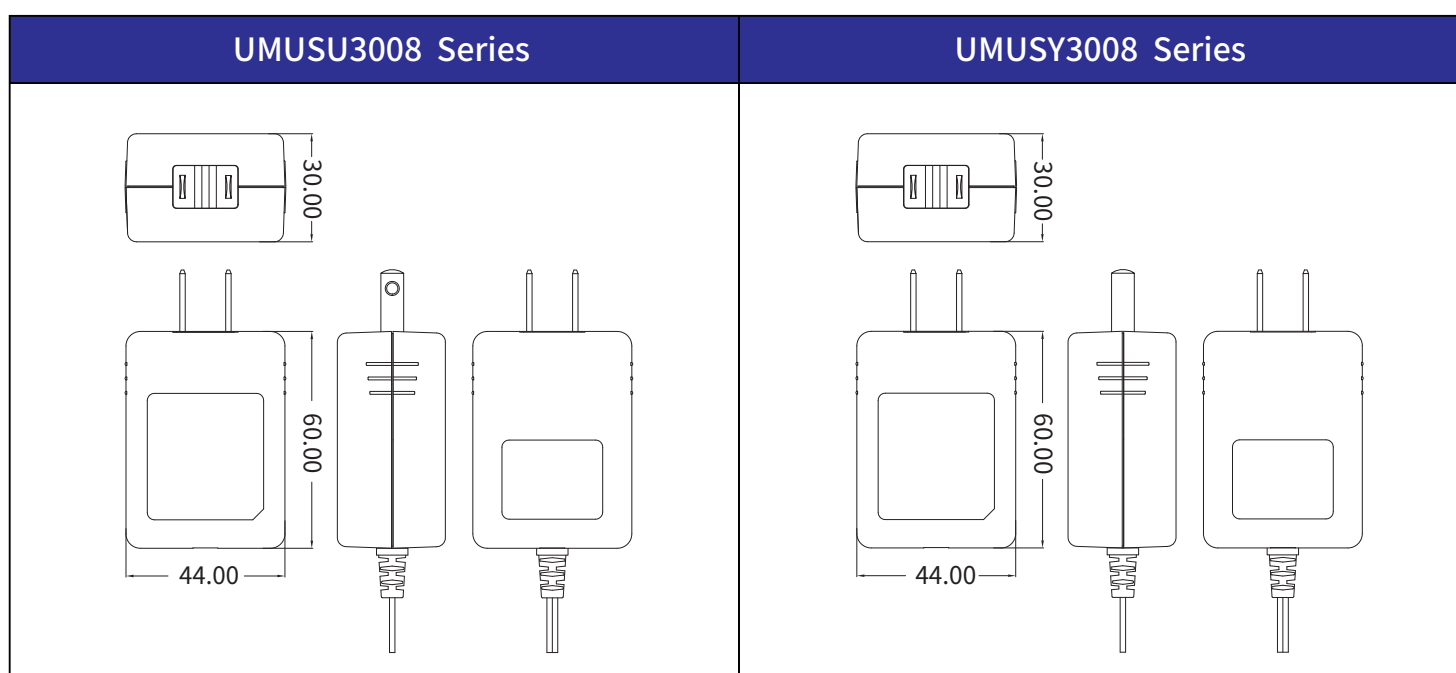

UMUSE3008 Series	UMUSR3008 Series
UMUSA3008 Series	UMUSK3008 Series

— the following blank —

■ Please contact our sales department for details of each model ■