

UM 100W Series



Medical AC/DC Adaptor



▲ UMI3100



▲ UMB3100



■ Please contact our sales department for safety standard of each model.

Product Highlights

- Stability
- Compact Size
- Energy Efficiency
- Suit Medical Equipment, Health Device
- 2xMOPP/2xMOOP
- IEC/EN 60601-1-2

Protection

- Short circuit Protection
- Over Voltage Protection
- Over Current Protection

Safety Standard

- 60601-1
- PSE 別表第八

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC Part18 Class B
- CE CISPR 11 EN55011
- VCCI Class B
- BS EN55011

Immunity

- EN60601-1-2
- BS EN60601-1-2

Electrical Spec

Input						
Description	Min.	Typ.	Max.	Units	Comment	
Voltage	90	100~240	264	Vac		
Frequency	47	50/60	63	Hz		
Power Factor	ACIN 100V	0.9	-	-	-	
	ACIN 230V	0.9	-	-	-	

Environmental						
Description	Min	Typ	Max	Units	Comment	
Operating Temperature	0	-	40	°C	Free Convection, Sea Level	
Storage Temperature	-20	-	65	°C	Free Convection, Sea Level	
Operating Humidity	5	-	95	%RH	No Condensing	
Storage Humidity	5	-	95	%RH	No Condensing	


Typical model list

No.	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	24.0V	4.167A	±5%	240mV	480mV	-	-	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

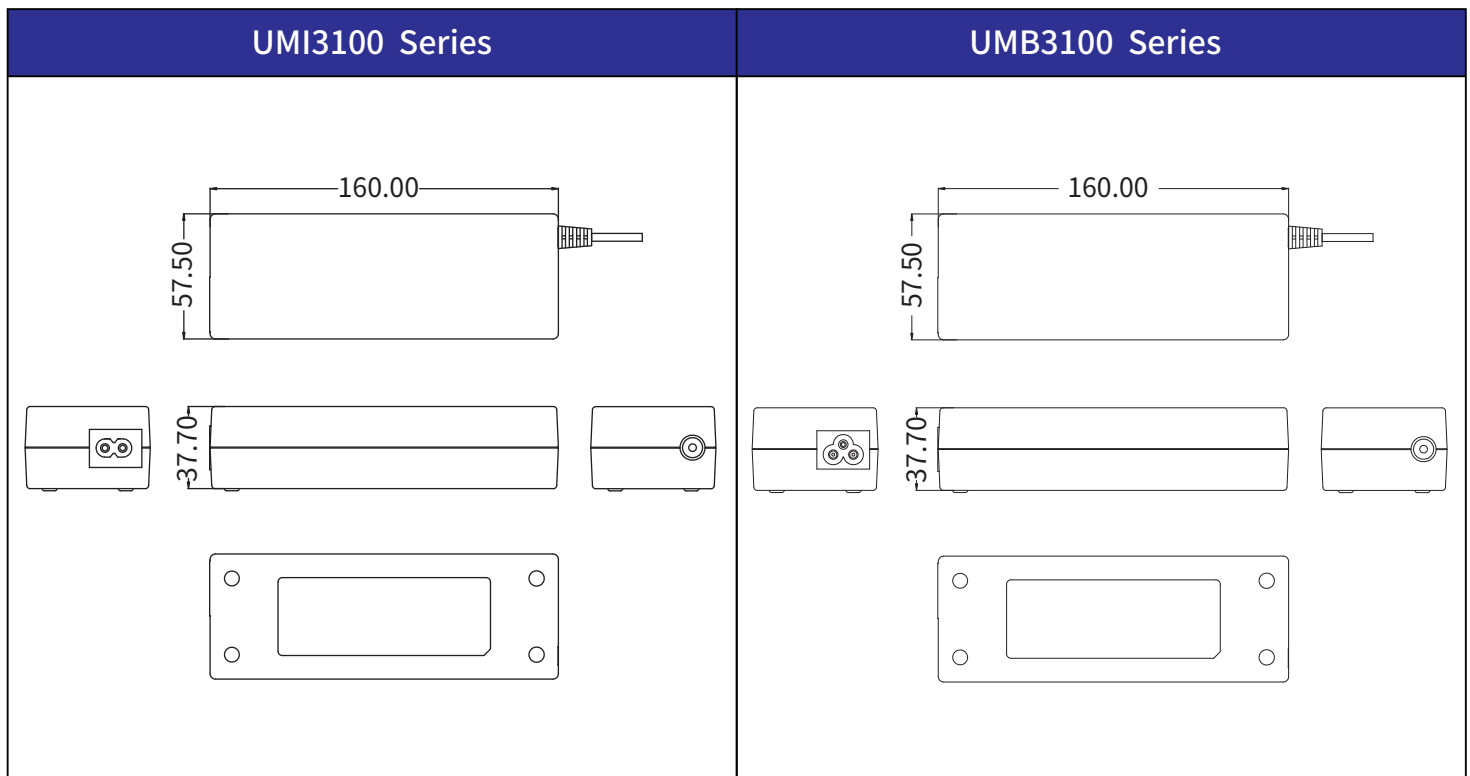

■ Please contact our sales department for details of each model ■